



User's Manual

**AMD Versal Plus Ryzen Mini-ITX Board
VPR-5050A-MB**

TRADEMARK

All products and company names are trademarks or registered trademarks of their respective holders.

These specifications are subject to change without notice.

Manual Revision 1.0

March 07, 2025

Federal Communications Commission (FCC) Statement

This device has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with instructions contained in this manual, may cause harmful interference to radio and television communications. However, there is no guarantee that interference will not occur in a particular installation.

If this product does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the product into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

 Note1: Connecting this device to peripheral devices that do not comply with Class B requirements, or using an unshielded peripheral data cable, could also result in harmful interference to radio or television reception.

 Note2: The user is cautioned that any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this product.

 Note3: To ensure that the use of this product does not contribute to interference, it is necessary to use shielded I/O cables.

CE: Radiation of EN 55022 & Immunity of EN 55024

Waste Electrical and Electronic Equipment (WEEE) Statement

To protect the global environment, this product must be sent to separate collection facilities for recovery and recycling.



DISPOSAL

Do not dispose of this product as unsorted municipal waste. Collect such waste separately for special treatment.



HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing, LLC in the United States and other countries.

Manufacturer

Sapphire Technology Limited
Unit 1909-1919, 19/F., Tower 2 Grand Central Plaza
138 Shatin Rural Committee Road
Shatin, Hong Kong

Table of Contents

Chapter 1 Introduction	1
1-1 Mainboard Specifications	1
1-2 Package Contents	4
1-3 Mainboard Layout	5
1-4 Mainboard Dimension	9
Chapter 2 Installation	11
2-1 Installing System Memory	11
Memory Configuration	11
Memory Installation	11
2-2 Installing Expansion Cards (Additional Purchase)	12
IO Expansion Board Socket	12
Dual Ethernet 1G Card	14
GMSL Card	15
Dual 10/25Gb SFP28 Card	17
PCIe Slot	19
M.2 E-Key Slot Installation	20
M.2 M-Key Slot Installation	20
2-3 Connecting Cables and Jumper Settings	24
Front Panel Header	24
SATA Power Header	25
USB2.0 Header	26
COM Header	26
Case Open Header	26
AMD FPGA JTAG Port (Internal Use Only)	27
AMD APU HDT+ Header (Internal Use Only)	27
VE2302 GPIO1 Header	27
AMD APU HDT Warm Reset Header (Internal Use Only)	27
VE2302 GPIO2 Header	28
AMD GPIO Header	28
External USB INPUT Connector (USB2-DEUG) (Select by JP4)	28
Fan Headers	29
PSLP Power Control Jumper (JP1)	29
PSFP Power Control Jumper (JP2)	29
FUSE Power Control Jumper (JP3)	30
USB Debug Port Selection Jumper of VE2302 (JP4)	30
VE2302 MODE Selection Jumper (JP5)	31

ROM Write Protect mode Jumper (JP6)	31
Versal Power Control Jumper (JP7)	31
Main Power Control Jumper (JP8)	31
Auto Power ON Jumper (JP9)	32
Clear CMOS Jumper (CMOS1)	32
2-4 System LED Status Indicators	33
2-5 Minimum connection required to boot	33
Chapter 3 Configuring the BIOS	34
3-1 Select Boot Device	34
3-2 Enter BIOS Setup	34
3-3 Main Menu	36
3-4 Advanced Menu	37
Trusted Computing	37
ACPI Settings	39
Hardware Monitor	40
RTC Wake Settings	43
Serial Port Console Redirection	44
CPU Configuration	45
SATA Configuration	46
SIO Configuration	47
PCI Subsystem Settings	47
USB Configuration	48
Network Stack Configuration	49
CSM Configuration	51
NVMe Configuration	52
Onboard Devices	53
AMD CBS	55
AMD PBS	58
3-5 Chipset Menu	60
3-6 Security Menu	62
3-7 Boot Menu	63
3-8 Save & Exit Menu	64
Chapter 4 Firmware and Driver Installation	65
Appendix A: BIOS Update	66
Appendix B: Qualified Vendors List	67
Appendix C: Expansion Board & Connector	71

Technical Support and Assistance

1. Visit the Sapphire Technology website at <https://support.sapphiretech.com/ticket-choose.asp?PDtype=EMB&lang=eng> to open a support ticket.
2. Contact your distributor, sales representative, or Sapphire's customer service center for technical support if you need additional assistance. Please have the following information ready before calling:
 - Product name and serial number
 - Description of your peripheral attachments
 - Description of your software (operating system, version, application software, etc.)
 - Comprehensive description of the problem
 - The exact wording of any error messages
3. Reference links

Xilinx Wiki - AMD Embedded+ Platform - General description of the AMD Embedded+ platform architectures which captures an AMD x86 paired with an AMD Adaptive SoC.

<https://xilinx-wiki.atlassian.net/wiki/spaces/A/pages/3011838141/AMD+Embedded+Platforms>

AMD Github - Embedded+ HW/PL platform repository.

GitHub - Xilinx/emb_plus_vitis_platforms

Chapter 1 Introduction

1-1 Mainboard Specifications

APU

- AMD® V2748 APU for FP6 package with Zen 2 core

Graphics

- AMD® Radeon graphics
- Supports two independent displays with DisplayPort and HDMI port
 - One DisplayPort supports a maximum resolution of 3840x2160@60Hz/144Hz
 - * Support for DisplayPort 1.4 version, HDCP 2.3 and HDR
 - One HDMI port supports a maximum resolution of 3840x2160@60Hz/120Hz
 - * Support for HDMI 2.1 version, HDCP 2.3 and HDR

System Memory

- Two 260-pin DDR4 SDRAM SO-DIMM (ECC/Non ECC) sockets
- Supports 1.2V DDR4-2133/2400/2666/3200 DIMMs with dual channel architecture
- Supports 4GB, 8GB, 16GB and 32GB DDR4 SO-DIMMs up to maximum 64GB

Xilinx Subsystem

- Versal Edge VE2302 in the SFVA784 package
- LPDDR4 16GB memory
- eMMC 64GB
- Infineon OPTIGA™ TPM SLM 9670 TPM2.0 in PG-VQFN-32-13 package

Expansion Slots

- One PCI Express 3.0 x8 slot
- One M.2 Slot E-key (PCIe 3.0 x1 and USB2.0) with 2230 type for Wifi/BT
- One M.2 Slot M-key (PCIe 3.0 x4 and SATA) with 2280/2580 storage type for SSD

USB Ports

- Three USB 2.0 ports (two at rear panel, one onboard headers), supporting transfer speed up to 480Mbps
- Two USB3.1 Gen 2 ports at rear panel supporting transfer speed up to 10Gbps
- One USB3.1 Gen 2 Type C port at back panel supporting transfer speed up to 10Gbps
- Supports wake-up from S3 and S4 modes

SATA Port

- One SATA3 port with 6Gb/s data transfer rate
- Supports AHCI (Advanced Host Controller Interface)

Onboard LAN

- 2.5 Gigabit Ethernet from Realtek® RTL8125BG Gigabit controller

Onboard Audio

- High-Definition audio from Realtek ALC888S codec

I/O

- Onboard Fintek F81803U LPC bus I/O controller
- Supports Hardware Monitor for fan speed monitoring, CPU and system temperature

Back Panel I/O Ports

- 1 x DC-in 12V Jack
- 1 x DisplayPort
- 1 x HDMI Port
- 2 x USB2.0 ports (Black)
- 2 x USB3.1 Gen 2 ports (Blue)
- 1 x RJ45 2.5 Gigabit LAN port
- 1 x COM port
- 1 x USB3.1 Gen 2 Type C Port
- 1 x Line-Out port
- 1 x Min-In port

Internal I/O Connectors

- 1 x DC-in 4-pin 12V Power Connector (PW1)
- 1 x IO Expansion Board Socket, connect to daughter card (J1)
- 1 x SATA3 Connectors (S1)
- 1 x SATA Power Header, 1x4pin 2.50mm pitch (SATA_PW)
- 1 x USB2.0 Headers, 2x5pin 2.54mm pitch (USB2, supports 2 USB2.0 ports)
- 1 x Front Panel Header, 2x5pin 2.54mm pitch (CFP1)
- 1 x COM Headers for RS232/422/485, 2x5pin 2.54mm pitch (COM2)
- 1 x Battery Headers, 1x2pin 1.25mm pitch (BAT)
- 1 x AMD FPGA JTAG Port, 2x7pin 2.54mm pitch (J2)
- 1 x AMD APU HDT+ Header, 2x10pin 1.27mm pitch (J5)
- 1 x VE2302 GPIO1 Header, 1x2pin 2.54mm pitch (J6)
- 1 x AMD APU HDT Warm Reset Header, 1x2pin 2.54mm pitch (J7)
- 1 x VE2302 GPIO2 Header, 1x2pin 2.54mm pitch (J8)
- 1 x AMD GPIO Header, 2x5pin 2.54mm pitch (J9)
- 1 x Case Open Header, 1x2pin 2.54mm pitch (J12)
- 1 x CPU Fan Header, 1x4pin 2.54mm pitch (CPUFAN)
- 1 x SYSTEM Fan Header, 1x3pin 2.54mm pitch (SYSFAN)
- 1 x PSLP POWER Control Jumper, 1x3pin 2.54mm pitch (JP1)
- 1 x PSFP POWER Control Jumper, 1x3pin 2.54mm pitch (JP2)
- 1 x FUSE Power Control Jumper, 1x3pin 2.54mm pitch (JP3)
- 1 x USB Debug Port Selection Jumper of VE2302, 1x3pin 2.54mm pitch (JP4)
- 1 x VE2302 MODE Selection, 1x2pin 2.54mm pitch (JP5)
- 1 x ROM Write Protect mode Jumper, 1x3pin 2.54mm pitch (JP6)
- 1 x Versal Power Control Jumper, 1x3pin 2.54mm pitch (JP7)
- 1 x Main Power Control Jumper, 1x3pin 2.54mm pitch (JP8)
- 1 x Auto Power ON Jumper, 1x3pin 2.54mm pitch (JP9)
- 1 x Clear CMOS Jumper, 1x3pin 2.54mm pitch (CMOS1)
- External USB INPUT Connector For VE2302 debug use (USB2-DEUG)

BIOS

- 64Mb SPI Flash with AMI based BIOS
- Supports ACPI (Advanced Configuration and Power Interface)
- Onboard jumper to clear the CMOS data

Onboard Button

- Onboard VE2302 Reset button

Form Factor

- Mini ITX form factor of 170mm×170mm

Operating systems

- Supports RHEL/CentOS 7.9; RHEL 8.2- 8.6; Ubuntu 22.04

Environmental

- Power Requirement: Power adapter of 12V DC OUT, input voltage tolerance +/- 5%
- Operating Temperature: 0°C~50°C (32°F~122°F)
- Storage Temperature: -20°C~80°C (-4°F~176°F)
- Relative Humidity: 10%~90%


1-2 Package Contents

Your mainboard comes with the following items.

Mainboard x1	I/O Shield x1
	

1-3 Mainboard Layout

The following figure shows the location of components on the mainboard. See page 6 for component description.

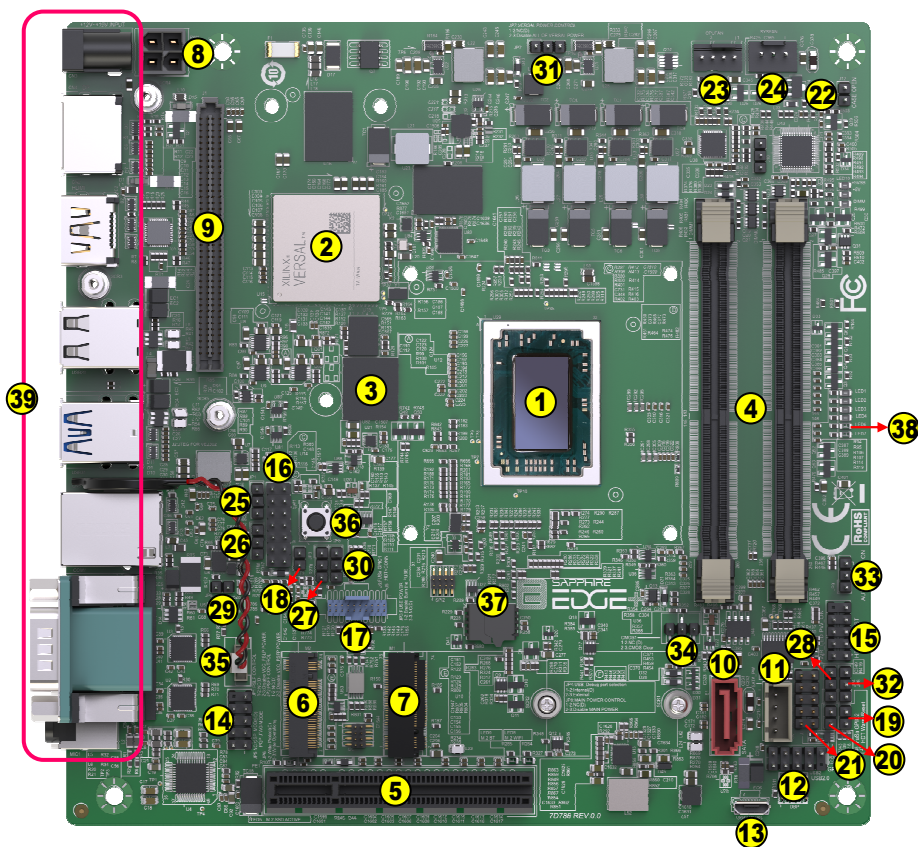

Note:


Picture is for reference only, actual board may be slightly different.

See next page for details.

Item	Component description	Location
1	AMD FP5 APU	U29
2	AMD VE2302 IC	U15
3	eMMC 64GB	U82
4	DDR4 SO-DIMM *2	DIMM0/1
5	PCIe 3.0 x8 Slot	PE1
6	M.2 M-key for SSD device	M2
7	M.2 E-Key slot for Wifi/BT card	M1
8	4-pin 12V Power Connector	PW1
9	IO Expansion Board Socket	J1
10	SATA3 Connector	S1
11	SATA Power Header, 1x4pin 2.50mm pitch	SATA_PW
12	USB 2.0 Header ^(Note) , 2x5pin 2.54mm pitch	USB2
13	External USB INPUT connector for VE2302 debug use	USB2-DEUG
14	COM Header for RS232/422/485 mode, 2x5pin 2.54mm pitch	COM2
15	Front Panel Header, 2x5pin 2.54mm pitch	CFP1
16	AMD FPGA JTAG Port, 2x7pin 2.54mm pitch	J2
17	AMD APU HDT+ Header, 2x10pin 1.27mm pitch	J5
18	VE2302 GPIO1 Header, 1x2pin 2.54mm pitch	J6
19	AMD APU HDT Warm Reset Header, 1x2pin 2.54mm pitch	J7
20	VE2302 GPIO2 Header, 1x2pin 2.54mm pitch	J8
21	AMD GPIO Header, 2x5pin 2.54mm pitch	J9
22	Case Open Header, 1x2pin 2.54mm pitch	J12
23	CPU Fan header, 1x4pin 2.54mm pitch	CPUFAN
24	SYSTEM Fan header, 1x3pin 2.54mm pitch	SYSFAN
25	PSLP POWER Control Jumper, 1x3pin 2.54mm pitch	JP1
26	PSFP POWER Control Jumper, 1x3pin 2.54mm pitch	JP2
27	FUSE Power Control Jumper, 1x3pin 2.54mm pitch	JP3
28	USB Debug Port Selection Jumper of VE2302, 1x3pin 2.54mm pitch	JP4
29	VE2302 MODE Selection, 1x2pin 2.54mm pitch	JP5
30	ROM Write Protect mode Jumper, 1x3pin 2.54mm pitch	JP6
31	Versal Power Control Jumper, 1x3pin 2.54mm pitch	JP7
32	Main Power Control Jumper, 1x3pin 2.54mm pitch	JP8
33	Auto Power ON Jumper, 1x3pin 2.54mm pitch	JP9
34	Clear CMOS jumper, 1x3pin 2.54mm pitch	CMOS1
35	Battery headers, 1x2pin 1.25mm pitch	BAT
36	VE2302 Reset button	SW1
37	BIOS Socket	U24
38	Versal DONE LED	LED6
39	Back Panel Connectors (see next page for detail)	

Note: Each USB 2.0 Header can be used to connect 2 USB device.

I/O Back Panel

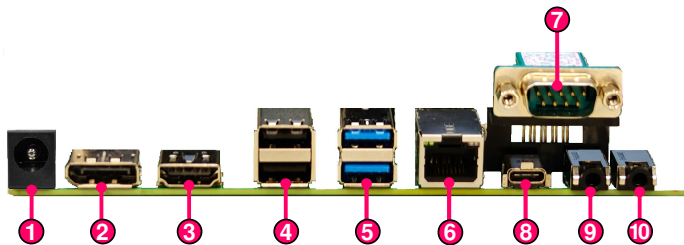


Item	Description	Item	Description
1	DC-IN 12V Jack	6	2.5G bps RJ45 LAN Port
2	Display Port	7	COM Port (RS232/422/485)
3	HDMI Port	8	USB3.1 Type C Gen 2 Port
4	USB2.0 Port *2	9	Line-Out port
5	USB3.1 Gen 2 Port *2	10	Mic-In port

Note:
There are two ways to source power to the board: DC-in jack or 4-pin power connector. Two different physical ports that can only be used one at a time.
e.g. When DC-in 12V jack is being used, the 4-pin power connector shouldn't be connected to any power source.

Warning:
One of the power inputs may be damaged when connecting both DC jack and 4-pin power connector at the same time.

LED indicates of LAN Port


Two LEDs are built into the RJ-45 LAN connector. These LEDs indicate the status of the LAN.



LED	LED Color	LED state	Indicates
A	Green	Off	LAN link is not established
		On	LAN link is established
		Blinking	LAN activity is occurring
B	N/A	Off	10/100M bps data rate
	Green	On	1000M bps data rate
	Yellow	On	2.5G bps data rate


DC-IN Jack

The DC-IN Jack supports only 12V Input.

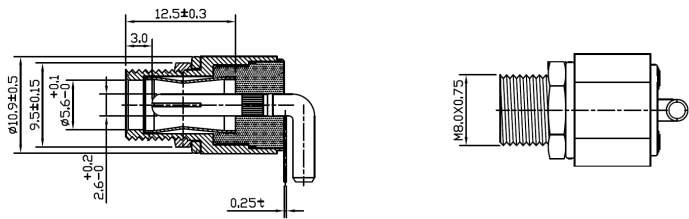


Reference DC power adapter:

- Output Power:
90W – Without installed PCIe graphic card
150W – With installed PCIe graphic card
- Output Voltage: 12V




1-4 Mainboard Dimension

PCB Size: 170 x 170mm

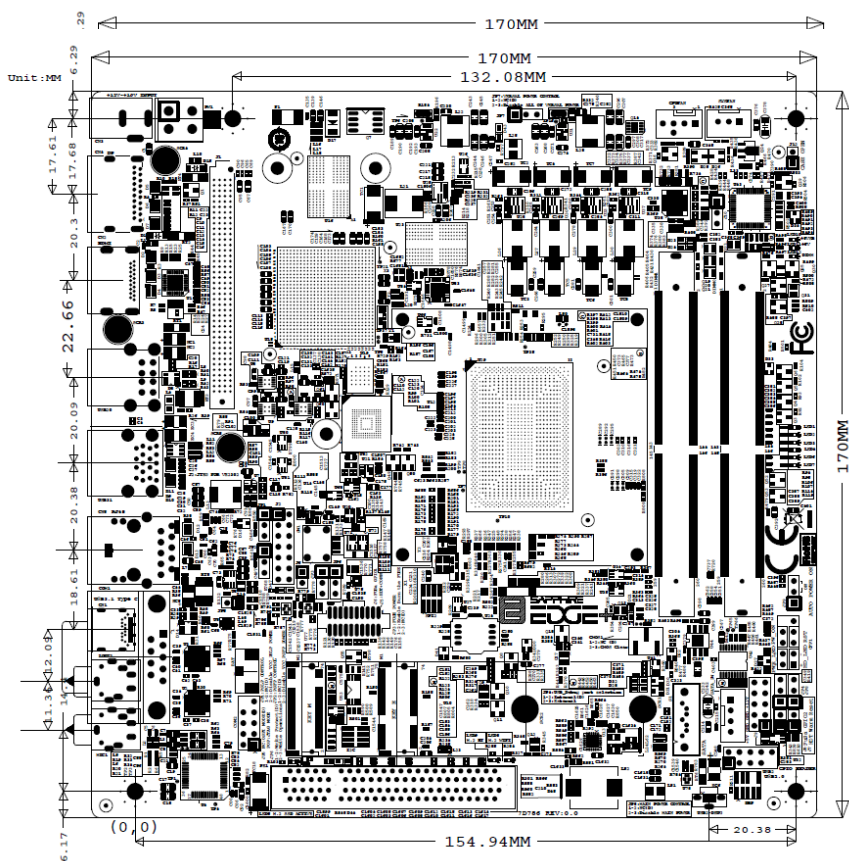

Mainboard with Cooler picture

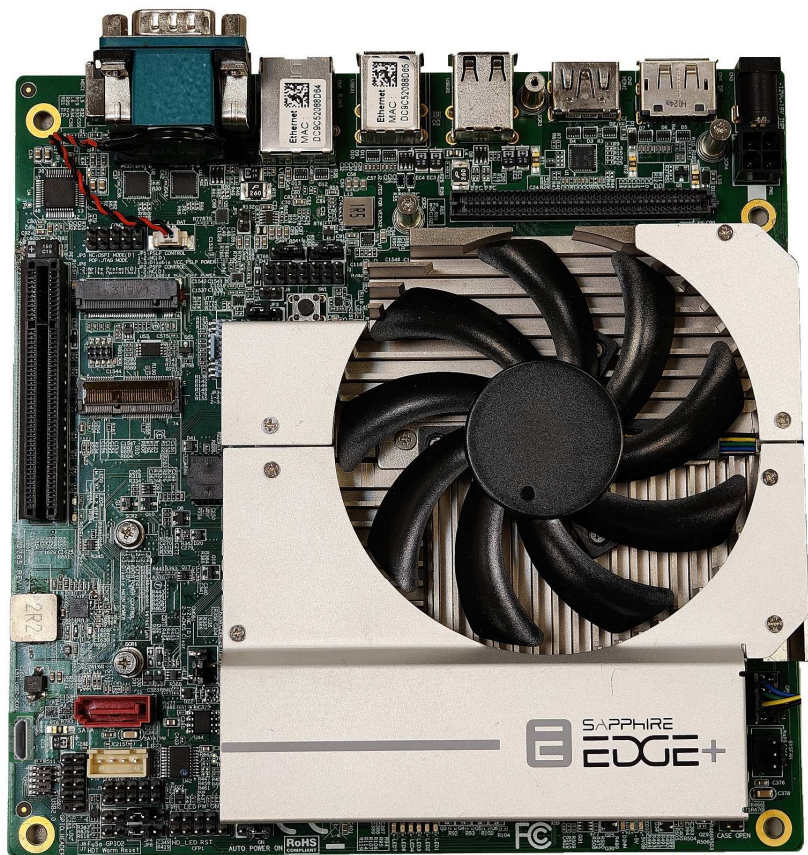

Chapter 2 Installation

2-1 Installing System Memory

This mainboard has two 260-pin SO-DIMM sockets (ECC/Non ECC) for DDR4 memory.


- Supports 4GB, 8GB, 16GB and 32GB DDR4 SO-DIMMs up to maximum 64GB.
- Supports 1.2V DDR4-2133/2400/2666/3200 DIMMs with dual channel architecture.

Make sure that you install memory modules of the same type and density in different channel DIMM slots for Dual-Channel mode.

Memory Configuration

To use 1 DIMM: Install into either DIMM slot 0 or slot 1.

To use 2 DIMMs: Install into DIMM slot 0 and DIMM slot 1.

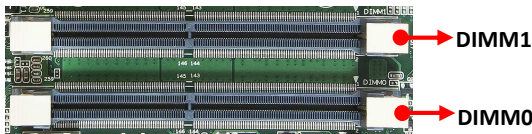

Memory Installation

DDR4 and DDR3 memory modules are physically different. Please only install DDR4 DIMMs on this mainboard. To make sure you have the correct DIMM, check that all the notches line up with the DDR4 DIMM slot.

To install the DIMM, follow these steps:

1. Pull both clips on either side of the slot outwards. Align the DIMM module with the slot.
2. Press modules straight down until the plastic clips close and the module fits tightly into the DIMM slot. Push clips inwards to make sure they are in place.

To remove DIMM from a socket, gently spread the socket's retention arms to disengage them from the DIMM.

Note: To avoid damaging the DIMM, do not touch its contact edge.

2-2 Installing Expansion Cards (Additional Purchase)


IO Expansion Board Socket

The mainboard provides one IO Expansion Board Socket, can be used to connect to a daughter card, like Dual Ethernet 1G card and GMSL card etc..

Note: The daughter cards are not included in standard package content. Users may want to purchase the daughter card according to their applications.

J1: IO Expansion Board Socket (Manufacturer PN: SEAF-40-07.5-L-04-1-A-K-TR)


PIN map between the FPGA and I/O connector on RAVE base board




Conn. Pin	Definition	FPGA Pin	Conn. Pin	Definition	FPGA Pin	Conn. Pin	Definition	FPGA Pin	Conn. Pin	Definition	FPGA Pin
A1	+3.3V		B1	+3.3V		C1	+3.3V		D1	+3.3V	
A2	VCC_CARD_EN	AD6	B2	GND		C2	LPD_MIO4_GPIO	Y2	D2	GND	
A3	GND		B3	GTYP_CLKP0	H7	C3	GND		D3	GTYP_CLKP1	F7
A4	GND		B4	GTYP_CLKN0	H6	C4	GND		D4	GTYP_CLKN1	F6
A5	GND		B5	GND		C5	GND		D5	GND	
A6	GTYP_TXP1	D8	B6	GTYP_TXP3	B8	C6	GTYP_TXP2	C5	D6	GTYP_TXP0	E5
A7	GTYP_TXN1	D7	B7	GTYP_TXN3	B7	C7	GTYP_TXN2	C4	D7	GTYP_TXN0	E4
A8	GND		B8	GND		C8	GND		D8	GND	
A9	GTYP_RXP0	F2	B9	GTYP_RXP1	D2	C9	GTYP_RXP2	B2	D9	GTYP_RXP3	A5
A10	GTYP_RXN0	F1	B10	GTYP_RXN1	D1	C10	GTYP_RXN2	B1	D10	GTYP_RXN3	A4
A11	GND		B11	GND		C11	GND		D11	GND	
A12	XPIO_L0P	J27	B12	XPIO_L1P	H27	C12	XPIO_L2P	G27	D12	XPIO_L3P	E27
A13	XPIO_L0N	H28	B13	XPIO_L1N	G28	C13	XPIO_L2N	F28	D13	XPIO_L3N	E28
A14	GND		B14	GND		C14	GND		D14	GND	
A15	XPIO_L4P	D27	B15	XPIO_L5P	C27	C15	XPIO_L6P	H25	D15	XPIO_L7P	G25
A16	XPIO_L4N	C28	B16	XPIO_L5N	B28	C16	XPIO_L6N	J26	D16	XPIO_L7N	G26
A17	GND		B17	GND		C17	GND		D17	GND	
A18	XPIO_L8P	F26	B18	XPIO_L9P	C25	C18	XPIO_L10P	A25	D18	XPIO_L11P	B26
A19	XPIO_L8N	E26	B19	XPIO_L9N	B25	C19	XPIO_L10N	A26	D19	XPIO_L11N	B27
A20	GND		B20	GND		C20	GND		D20	GND	
A21	XPIO_L12P	H23	B21	XPIO_L13P	F22	C21	XPIO_L14P	E22	D21	XPIO_L15P	D24
A22	XPIO_L12N	H24	B22	XPIO_L13N	G23	C22	XPIO_L14N	E23	D22	XPIO_L15N	C24
A23	GND		B23	GND		C23	GND		D23	GND	
A24	XPIO_L16P	C23	B24	XPIO_L17P	A23	C24	XPIO_L18P	G21	D24	XPIO_L19P	E20
A25	XPIO_L16N	B23	B25	XPIO_L17N	A24	C25	XPIO_L18N	H22	D25	XPIO_L19N	F21
A26	GND		B26	GND		C26	GND		D26	GND	
A27	XPIO_L20P	D20	B27	XPIO_L21P	B20	C27	XPIO_L22P	A20	D27	XPIO_L23P	C22
A28	XPIO_L20N	D21	B28	XPIO_L21N	C21	C28	XPIO_L22N	A21	D28	XPIO_L23N	B22
A29	GND		B29	GND		C29	GND		D29	GND	
A30	XPIO_L24P	F23	B30	XPIO_L25P	E24	C30	XPIO_L26P	D25	D30	VCCO_XPIO POWER	
A31	XPIO_L24N	F24	B31	XPIO_L25N	F25	C31	XPIO_L26N	D26	D31	VCCO_XPIO POWER	
A32	GND		B32	GND		C32	GND		D32	GND	
A33	HDIO0	F14	B33	HDIO1	E14	C33	HDIO2	C14	D33	HDIO3	C13
A34	HDIO4	E13	B34	HDIO5	D14	C34	HDIO6	D12	D34	HDIO7	D12
A35	HDIO8	F11	B35	HDIO9	E11	C35	HDIO10	D11	D35	HDIO11	C12
A36	GND		B36	GND		C36	GND		D36	GND	
A37	HDIO12	D10	B37	HDIO13	C10	C37	HDIO14	B10	D37	HDIO15	A10
A38	HDIO16	B11	B38	HDIO17	A11	C38	HDIO18	B12	D38	VCCO_HDIO POWER	
A39	HDIO19	A13	B39	HDIO20	B13	C39	HDIO21	A14	D39	VCCO_HDIO POWER	
A40	GND		B40	GND		C40	GND		D40	GND	

Expansion Board Dimension Specification


● Expansion Board Outline Dimension

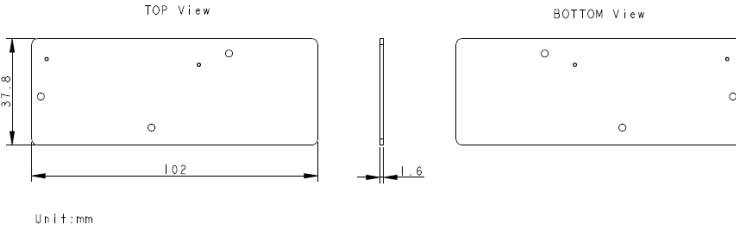


● Screw Hole Location & Dimension

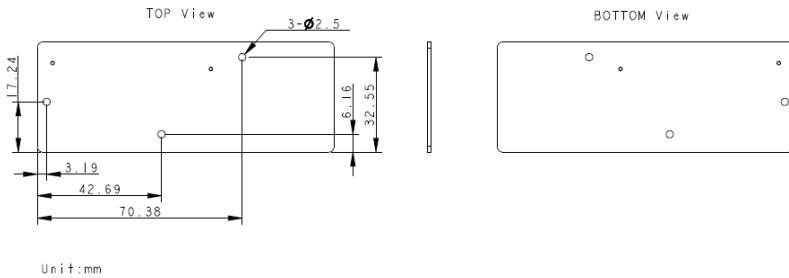



● Connector Layout Location SEAM-40-11.0-L-04-2-A-K-TR

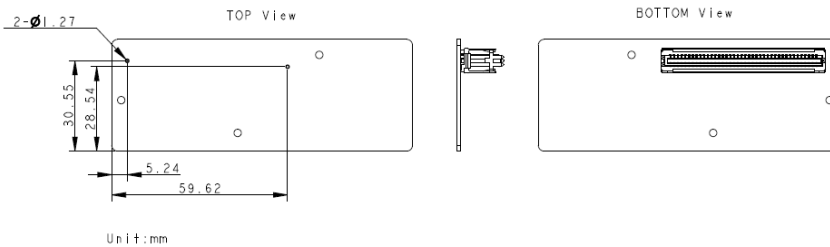

● Component Height Limit

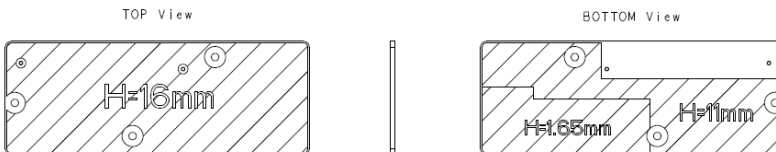

Dual Ethernet 1G Card




IO Expansion connector pin map

Pin #	I/O Bank	PHY #	PHY Signals	Pin #	I/O Bank	PHY #	PHY Signals
A01	+3.3V_RUN		3.3V	B01	+3.3V_RUN		3.3V
A02	VCC_CARD_EN		POWER_EN	B15	XPIO_L5P	0	ETH_RESET
A15	XPIO_L4N	0	MDIO	B16	XPIO_L5N	0	MDC
A18	XPIO_L8P	0	TXD2	B18	XPIO_L9P	0	RX_CLK
A19	XPIO_L8N	0	TXD3	B19	XPIO_L9N	0	RX_CTL
A21	XPIO_L12P	1	TX_CLK	B21	XPIO_L13P	1	TXD0
A22	XPIO_L12N	1	TX_CTL	B22	XPIO_L13N	1	TXD1
A30	XPIO_L24P	1	RX_CLK	B30	XPIO_L25P	1	RXD1
A31	XPIO_L24N	1	RX_CTL	B31	XPIO_L25N	1	RXD0
A37	HDIO12	1	CLKIN				


Pin #	I/O Bank	PHY #	PHY Signals	Pin #	I/O Bank	PHY #	PHY Signals
C01	+3.3V_RUN		3.3V	D01	+3.3V_RUN		3.3V
C02	LPD_MIO4_GPIO		Serial I/O	D15	XPIO_L7P	0	TXD0
C15	XPIO_L6P	0	TX_CLK	D16	XPIO_L7N	0	TXD1
C16	XPIO_L6N	0	TX_CTL	D18	XPIO_L11P	0	RXD2
C18	XPIO_L10P	0	RXD0	D19	XPIO_L11N	0	RXD3
C19	XPIO_L10N	0	RXD1	D27	XPIO_L23P	1	ETH_RESET
C21	XPIO_L14P	1	TXD2	D30	VCCO_XPIO		1.5V
C22	XPIO_L14N	1	TXD3	D31	VCCO_XPIO		1.5V
C27	XPIO_L22P	1	MDIO	D38	VCCO_HDIO		1.8V
C28	XPIO_L22N	1	MDC	D39	VCCO_HDIO		1.8V
C30	XPIO_L26P	1	RXD3				
C31	XPIO_L26N	1	RXD2				
C35	HDIO10	0	CLKIN				

To install the Dual Ethernet 1G Card:

- Align the card with the IO Expansion Board Socket, and press down on the card until it is completely seated in the slot.
- Fasten Dual Ethernet 1G Card onto the nut with accompanied screws.



GMSL Card

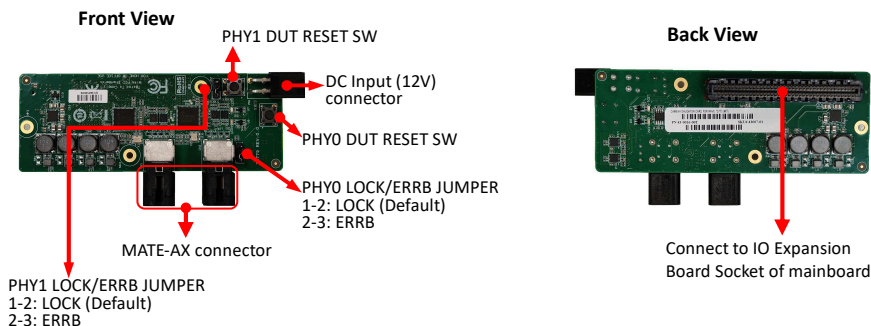

CN1 MATE-AX conn. power controller I2C address: 0x50/0x51

PHY0 CFG0 controller I2C address: 0x52/0x53

PHY0 CFG1 controller I2C address: 0x56/0x57

CN2 MATE-AX conn. power controller I2C address: 0x52/0x53

PHY1 CFG0 controller I2C address: 0x50/0x51

PHY1 CFG1 controller I2C address: 0x54/0x55

Note: When the value has been adjusted using I2C address.
You need to restart the power with A02 pin (POWER_EN).



IO Expansion connector pin map

Pin #	I/O Bank	PHY #	PHY Signals	Pin #	I/O Bank	PHY #	PHY Signals
A01	+3.3V_RUN		3.3V	B01	+3.3V_RUN		3.3V
A02	VCC_CARD_EN		POWER_EN	B12	XPIO_L3P	1	DA2P
A15	XPIO_L2P	1	DA1P	B13	XPIO_L3N	1	DA2N
A16	XPIO_L2N	1	DA1N	B15	XPIO_L4P	1	DA0P
A18	XPIO_L7P	0	DB1P	B16	XPIO_L4N	1	DA0N
A19	XPIO_L7N	0	DB1N	B18	XPIO_L8P	0	DB2P
A21	XPIO_L16P	1	CKBP	B19	XPIO_L8N	0	DB2N
A22	XPIO_L16N	1	CKBN	B21	XPIO_L12P	1	DB0P
A24	XPIO_L15P	1	DB3P	B22	XPIO_L12N	1	DB0N
A25	XPIO_L15N	1	DB3N	B27	XPIO_L21P	0	DA0P
A27	XPIO_L20P	0	DA2P	B28	XPIO_L21N	0	DA0N
A28	XPIO_L20N	0	DA2N	B33	HDIO1	Shared	CFG_I2C_SDA
A33	HDIO0	Shared	CFG_I2C_SCL	B34	HDIO5	PHY0_MFP5	PHY0_ERRB
A34	HDIO4	PHY0_MFP4	PHY0_LOCK	B35	HDIO9	PHY0_MFP3	PHY0_GPIO3
A35	HDIO8	PHY0_MFP2	PHY0_GPIO2	B37	HDIO13	PHY1_MFP7	PT_I2C_SDA_1
A37	HDIO12	PHY1_MFP8	PT_I2C_SCL_1	B38	HDIO17	PHY1_MFP1	PHY1_GPIO1
A38	HDIO16	PHY1_MFP0	PHY1_GPIO0	B39	HDIO20	PHY0/PHY1	CFG2_SELO
A39	HDIO19	PHY1_MFP3	PHY1_GPIO3				

Pin #	I/O Bank	PHY #	PHY Signals	Pin #	I/O Bank	PHY #	PHY Signals
C01	+3.3V_RUN		3.3V	D01	+3.3V_RUN		3.3V
C02	LPD_MIO4_GPIO		Serial I/O	D12	XPIO_L5P	1	CKAP
C12	XPIO_L1P	1	DA3P	D13	XPIO_L5N	1	CKAN
C13	XPIO_L1N	1	DA3N	D15	XPIO_L6P	0	DB0P
C15	XPIO_L10P	0	CKBP	D16	XPIO_L6N	0	DB0N
C16	XPIO_L10N	0	CKBN	D21	XPIO_L14P	1	DB2P
C18	XPIO_L9P	0	DB3P	D22	XPIO_L14N	1	DB2N
C19	XPIO_L9N	0	DB3N	D24	XPIO_L19P	0	DA3P
C21	XPIO_L13P	1	DB1P	D25	XPIO_L19N	0	DA3N
C22	XPIO_L13N	1	DB1N	D30	VCCO_XPIO		1.2V
C24	XPIO_L18P	0	CKAP	D31	VCCO_XPIO		1.2V
C25	XPIO_L18N	0	CKAN	D33	HDIO3	PHY0_MFP7	PT_I2C_SDA_0
C27	XPIO_L22P	0	DA1P	D34	HDIO7	PHY0_MFP1	PHY0_GPIO1
C28	XPIO_L22N	0	DA1N	D35	HDIO11	PHY1_PWDNB	PWDNB_1
C33	HDIO2	PHY0_MFP8	PT_I2C_SCL_0	D37	HDIO15	PHY1_MFP5	PHY1_ERRB
C34	HDIO6	PHY0_MFP0	PHY0_GPIO0	D38	VCCO_HDIO		1.8V
C35	HDIO10	PHY0_PWDNB	PWDNB_0	D39	VCCO_HDIO		1.8V
C37	HDIO14	PHY1_MFP4	PHY1_LOCK				
C38	HDIO18	PHY1_MFP2	PHY1_GPIO2				
C39	HDIO21	PHY0/PHY1	CFG2_SEL1				


To install the GMSL Card:

1. Align the card with the IO Expansion Board Socket, and press down on the card until it is completely seated in the slot.
2. Fasten GMSL Card onto the nut with accompanied screws.




Dual 10/25Gb SFP28 Card

Front View



Mini50 connector SFP28 connector

Back View





LED1~LED4

LED1: SFP0_ACT_LED
LED2: SFP0_RX_LOS_LED
LED3: SFP1_ACT_LED
LED4: SFP1_RX_LOS_LED

Connect to IO Expansion Board Socket of mainboard

Mini50 P/N: 34826-8200



Pin	Definition	FPGA Pin	Pin	Definition	FPGA Pin
1	GPI0	F14	9	GPO0	C13
2	GPI1	E14	10	GPO1	E13
3	GPI2	C14	11	GPO2	D14
4	GND		12	GPI3	E12
5	GND		13	GPI4	D12
6	GPI6	D10	14	GPI5	F11
7	GPI7	C10	15	GPO3	E11
8	GPI8	B10	16	GPO4	D11
			17	GPO5	C12
			18	GPO8	B12
			19	GPO7	A11
			20	GPO6	A10


IO Expansion connector pin map

Connector Pin #	Signals	FPGA Pin#	Host Signals	Connector Pin #	Signals	FPGA Pin#	Host Signals
A01	+3.3V_RUN		+3.3V	B01	+3.3V_RUN		+3.3V
A02	POWER_EN	AD6	VCC_CARD_EN	B03	REF_CLK0_P	H7	GTYP_REFCLK0_P
A06	SFP1_TX_P	D8	GTYP_TX1_P	B04	REF_CLK0_N	H6	GTYP_REFCLK0_N
A07	SFP1_TX_N	D7	GTYP_TX1_N	B09	SFP1_RX_P	D2	GTYP_RX1_P
A09	SFP0_RX_P	F2	GTYP_RX0_P	B10	SFP1_RX_N	D1	GTYP_RX1_N
A10	SFP0_RX_N	F1	GTYP_RX0_N	B33	GPI1	E14	HDIO1
A33	GPI0	F14	HDIO0	B34	GPO2	D14	HDIO5
A34	GPO1	E13	HDIO4	B35	GPO3	E11	HDIO9
A35	GPI5	F11	HDIO8	B37	GPI7	C10	HDIO13
A37	GPI6	D10	HDIO12	B38	GPO7	A11	HDIO17
A38	I2C_SCL	B11	HDIO16	B39	REF_CLK0_DISABLE_L	B13	HDIO20
A39	I2C_SDA	A13	HDIO19				

Connector Pin #	Signals	FPGA Pin#	Host Signals	Connector Pin #	Signals	FPGA Pin#	Host Signals
C01	+3.3V_RUN		+3.3V	D01	+3.3V_RUN		+3.3V
C02	Serial I/O	Y2	LPD_MIO4_GPIO	D03	REF_CLK1_P	F7	GTYP_REFCLK1_P
C33	GPI2	C14	HDIO2	D04	REF_CLK1_N	F6	GTYP_REFCLK1_N
C34	GPI3	E12	HDIO6	D06	SFP0_TX_P	E5	GTYP_TX0_P
C35	GPO4	D11	HDIO10	D07	SFP0_TX_N	E4	GTYP_TX0_N
C37	GPI8	B10	HDIO14	D33	GPO0	C13	HDIO3
C38	GPO8	B12	HDIO18	D34	GPI4	D12	HDIO7
C39	REF_CLK1_DISABLE_L	A14	HDIO21	D35	GPO5	C12	HDIO11
				D37	GPO6	A10	HDIO15
				D38	VCCO_HDIO		+3.3V
				D39	VCCO_HDIO		+3.3V

To install the SFP28 Card:

1. Align the card with the IO Expansion Board Socket, and press down on the card until it is completely seated in the slot.
2. Fasten SFP28 Card onto the nut with accompanied screws.




M.2 E-Key Slot/ M.2 M-Key Slot

The mainboard provides

One PCI Express 3.0 x8 slot

One M.2 Slot M-key (PCIe 3.0 x4 and SATA) with 2280/2580 storage type for SSD

One M.2 Slot E-key (PCIe 3.0 x1 and USB2.0) with 2230 type for Wifi/BT

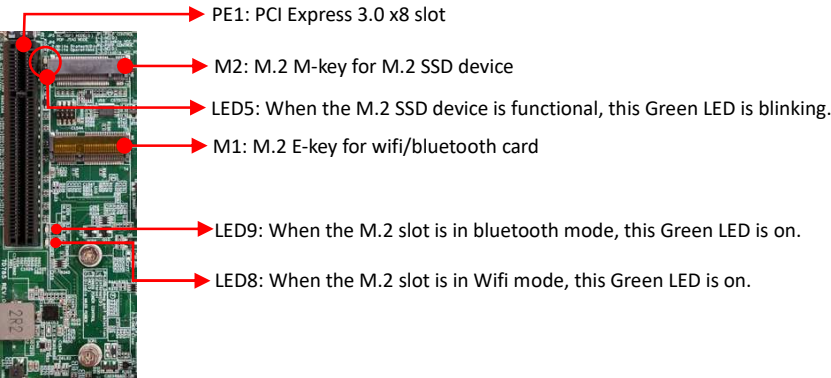

Note:
Recommended torque for the M.2 hold down screws: 1 ~ 1.5lbf.

PCIe Slot

PCI Express 3.0 x8 slot (PE1)

The design of this motherboard supports PCIe interface expansion card complying with the PCI Express specification.

PCIe Slot Types	12V (A/W)	3.3V (A/W)	3.3V_aux (A/W)	Maximum Power (W)
PCIe x8	5.5A / 66W	3.0A / 9.9W	0.375A / 1.2375W	<=75W



To install a PCI Express card:

1. Place the card in an available PCI Express slot and press down on the card until it is completely seated in the slot. If the card is not seated properly, it could cause a short across the pins.
2. Secure the card's metal bracket to the chassis back panel with a screw.

M.2 E-Key Slot Installation

To install the M.2 wifi/bluetooth card (type 2230):



1. Remove screws and align the notch on the M.2 wifi/bluetooth card edge connector with the tab in the slot.
2. Plug the M.2 wifi/bluetooth card firmly into the slot at a 20-degree angle, and until it clicks into place.
3. Fasten M.2 wifi/bluetooth card onto the nut with accompanied screws.



M.2 M-Key Slot Installation

To install the M.2 SSD device (type 2280/2580):

3. Remove screws and align the notch on the M.2 SSD device edge connector with the tab in the slot.
4. Plug the M.2 SSD device firmly into the slot at a 20-degree angle, and until it clicks into place.
5. Fasten M.2 SSD device onto the nut with accompanied screws.



Note:
The mainboard in the picture is not actual mainboard, just for reference.

Removing Device Caution

- Remove the M.2 wifi/bluetooth card or M.2 SSD device at a 20-degree angle.
- Please DO NOT pull up the M.2 wifi/bluetooth card or M.2 SSD device to avoid damage to the M.2 slot.



M.2 E-key 2230 – Supports PCIe x1 & USB2.0 based device

Pin id.	Pin name	Description	Voltage
1	GND	Ground	
2	+3.3V	3.3 V power supply	
3	USB_D+	USB high-, full-, and low- speed data pair positive	
4	+3.3V	3.3 V power supply	
5	USB_D-	USB high-, full-, and low- speed data pair negative	
6	LED1#	M2_WL_LED-	
7	GND	Ground	
8	N/A		
9	N/A		
10	N/A		
11	N/A		
12	N/A		
13	N/A		
14	N/A		
15	N/A		
16	LED2#	M2_BT_LED-	
17	N/A		
18	GND	Ground	
19	N/A		
20	WAKE#	M2_BT_WAKE-	0/3.3V
21	N/A		
22	N/A		
23	N/A		
24-31	Key E	Substrate removed to act as physical key	
32	N/A		
33	GND	Ground	
34	N/A		
35	PETp0	PCI Express lane 0 module transmitter pair positive	
36	N/A		
37	PETn0	PCI Express lane 0 module transmitter pair negative	
38	Devic WAKE#	BT_DEV_WAKE-	0/3.3V
39	GND	Ground	
40	N/A		
41	PERp0	PCI Express lane 0 module receiver pair positive	
42	N/A		
43	PERn0	PCI Express lane 0 module receiver pair negative	
44	N/A		
45	GND	Ground	
46	N/A		
47	PEFCLKP0	PCI Express reference clock pair positive	
48	N/A		
49	PEFCLKN0	PCI Express reference clock pair negative	
50	SUSCLK	32.768 kHz clock module input	0/3.3V
51	GND	Ground	
52	PERSTO#	PCI Express reset	0/3.3V
53	CLKREQ0#	PCI Express clock request	0/3.3V
54	W_DISABLE2#	Wireless disable 2	0/3.3V
55	PEWake0#	PCI Express wake	0/3.3V
56	W_DISABLE1#	Wireless disable 1	0/3.3V
57	GND	Ground	
58	N/A		
59	N/A		
60	N/A		
61	N/A		
62	N/A		
63	GND	Ground	
64	N/A		
65	N/A		
66	N/A		
67	Reserved/PERn1		
68	N/A		
69	GND	Ground	
70	N/A		
71	N/A		
72	+3.3V	power supply	3.3 V
73	N/A		
74	+3.3V	power supply	3.3 V
75	GND	Ground	

M.2 M-key 2280– Supports PCIe x4 NVMe & SATA SSD Storage

Pin id.	Pin name	Description	Voltage
1	NC	No Connect	
2	3.3 V	Supply pin	3.3 V
3	GND	Ground	
4	3.3 V	Supply pin	3.3 V
5	PERn3	PCIe Lane 3 Rx	
6	N/A		
7	PERp3	PCIe Lane 3 Rx	
8	N/A		
9	GND	Ground	
10	DAS/DSS	Device Activity Signal / Disable Staggered Spinup	
11	PETn3	PCIe Lane 3 Tx	
12	3.3 V	Supply pin	3.3 V
13	PETp3	PCIe Lane 3 Tx	
14	3.3 V	Supply pin	3.3 V
15	GND	Ground	
16	3.3V	Supply pin	3.3 V
17	PERn2	PCIe Lane 2 Rx	
18	3.3 V	Supply pin	3.3 V
19	PERp2	PCIe Lane 2 Rx	
20	N/A		
21	GND	Ground	
22	N/A		
23	PETn2	PCIe Lane 2 Tx	
24	N/A		
25	PETp2	PCIe Lane 2 Tx	
26	N/A		
27	GND	Ground	
28	N/A		
29	PERn1	PCIe Lane 1 Rx	
30	N/A		
31	PERp1	PCIe Lane 1 Rx	
32	N/A		
33	GND	Ground	
34	N/A		
35	PETn1	PCIe Lane 1 Tx	
36	N/A		
37	PETp1	PCIe Lane 1 Tx	
38	N/A		
39	GND	Ground	
40	N/A		
41	SATA-B+/PERn0	Host receiver differential signal pair. If in PCIe mode PCIe Lane 0 Rx	
42	N/A		
43	SATA-B-/PERp0	Host receiver differential signal pair. If in PCIe mode PCIe Lane 0 Rx	
44	N/A		
45	GND	Ground	
46	N/A		
47	SATA-A-/PETn0	Host transmitter differential signal pair. If in PCIe mode PCIe Lane 0 Tx	
48	N/A		
49	SATA-A+/PETp0	Host transmitter differential signal pair. If in PCIe mode PCIe Lane 0 Tx	
50	PERST#	PCIe reset	
51	GND	Ground	
52	CLKREQ#	Reference clock request signal	
53	REFCLKN	PCIe Reference Clock signals (100 MHz)	
54	PEWAKE#	PCIe WAKE# Open Drain with pull up on platform. Active Low.	
55	REFCLKP	PCIe Reference Clock signals (100 MHz)	
56	N/A		
57	GND	Ground	
58	N/A		
59-66	removed (Key M)	Mechanical notch M	
67	N/A		
68	SUSCLK	32.768 kHz clock supply input provided by the Platform chipset	
69	CONFIG_1	Defines module type (0 :SATA 1:NVME)	
70	3.3 V	Supply pin	3.3 V
71	GND	Ground	
72	3.3 V	Supply pin	3.3 V
73	GND	Ground	
74	3.3 V	Supply pin	3.3 V
75	GND	Ground	

2-3 Connecting Cables and Jumper Settings

This section takes you through all the necessary connections on the mainboard.

Front Panel Header

The front panel header (CFP1, 2.54mm pitch) on this motherboard is used to connect the front panel switches and LEDs.

▶ **PWR_LED**

Attach the front panel power LED cable to these two pins of the connector. The Power LED indicates the system's status.

System Status	Power LED indicates
S0	The LED is on
S5	The LED is off
S3	The LED will blink
S4	The LED is off

▶ **PW_ON**


Attach the power button cable from the case to these two pins. Pressing the power button on the front panel turns the system on and off rather than using the onboard button.

▶ **HD_LED**

Attach the hard disk drive indicator LED cable to these two pins. The HDD indicator LED indicates the activity status of the hard disks.

▶ **RESET**


Attach the Reset switch cable from the front panel of the case to these two pins. The system restarts when the RESET switch is pressed.

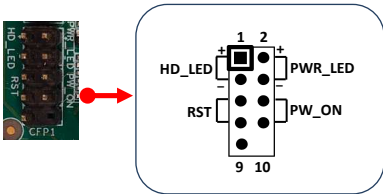

Header	Pin	Signal
HD_LED	1	HD_PWR
	3	HD Active
PWRLED	2	PWR LED+
	4	PWR LED-
RESET	5	Ground
	7	RST BTN
PWRSW	6	PWR BTN
	8	Ground
No Connect	9	+5V
Empty	10	Empty

4-pin 12V Power Connector

PW1, This power connector is used to provide power to the system. Align the power plug to the connector and press firmly until seated.



Pin	Definition
1	GND
2	GND
3	12V
4	12V




DC-in Jack (CN3)

Note 1:
There are two ways to source power to the board: DC-in jack or 4-pin power connector. Two different physical ports that can only be used one at a time.
e.g. When DC-in 12V jack is being used, the 4-pin power connector shouldn't be connected to any power source.

Warning:
One of the power inputs may be damaged when connecting both DC jack and 4-pin power connector at the same time.

SATA3 Connector


The S1 is SATA3 Connectors and works at speeds of up to 6G/s. Each cable can be used to connect one SATA drive to the mainboard.



Pin	Definition
1	GND
2	TX+
3	TX-
4	GND
5	RX-
6	RX+
7	GND

SATA Power Header


The SATA Power header is used to provide 5V and 12V power to SATA3 connector.



Pin	Definition
1	+12V
2	GND
3	GND
4	+5V

USB2.0 Header


This mainboard contains one 2x5-pin onboard header (USB2, 2.54mm pitch) that can be used to connect to two (2) external USB 2.0 devices.



Pin	Definition	Pin	Definition
1	VCC	2	VCC
3	USB0- (from FP6)	4	USB1- (from USBPHY_USB3320C)
5	USB0+ (from FP6)	6	USB1+ (from USBPHY_USB3320C)
7	GND	8	GND
9	Empty	10	No Connect

COM Header

The Serial port header (COM2, 2.54mm pitch) can provide one serial port via an optional COM port cable.




Pin	Definition	Pin	Definition
1	DCD	2	RXD
3	TXD	4	DTR
5	GND	6	DSR
7	RTS	8	CTS
9	RI#	10	Empty

Note:
The pin definition of header and standard DB9 male pin out is different.

Case Open Header


This header (J12, 2.54mm pitch) is used for a chassis open detect. When set, the warning message will appear during POST when the case is opened.



Pin	Definition
1	Case Open
2	GND

AMD FPGA JTAG Port (Internal Use Only)


This header (J2, 2.54mm pitch)



Pin	Definition	Pin	Definition
1	GND	2	+1.8V
3	GND	4	VE2302_TMS
5	GND	6	VE2302_TCK
7	GND	8	VE2302_TDO
9	GND	10	VE2302_TDI
11	GND	12	NC
13	GND	14	RESET-

AMD APU HDT+ Header (Internal Use Only)


This header (J5, 1.27mm pitch)



Pin	Definition	Pin	Definition
1	+1.8V_ALW	2	APU_TCK
3	GND	4	APU_TMS
5	GND	6	APU_TDI
7	GND	8	APU_TDO
9	APU_TRST-	10	APU_PWRGD
11	GND	12	RESET-
13	GND	14	NC
15	GND	16	APU_DBREQ-
17	GND	18	NC
19	+1.8V_ALW	20	NC

VE2302 GPIO1 Header


This header (J6, 2.54mm pitch)



Pin	Definition
1	FuSa_GPIO_1
2	GND

AMD APU HDT Warm Reset Header (Internal Use Only)


This header (J7, 2.54mm pitch)



Pin	Definition
1	APU Reset-
2	GND

VE2302 GPIO2 Header


This header (J8, 2.54mm pitch)



Pin	Definition
1	FuSa_GPIO_2
2	GND

AMD GPIO Header

There is a GPIO (General-purpose input/output) header (J9, 2.54mm pitch) on the motherboard. It can connect a variety of simple one- or two-wire devices.




Pin	Definition	Pin	Definition
1	GPIO	2	GPIO
3	GPIO	4	GPIO
5	GPIO	6	GPIO
7	GPIO	8	GPIO
9	+3.3V_ALW	10	GND

External USB INPUT Connector (USB2-DEUG) (Select by JP4)

When the JP4 plug connects pins 1-2, the FPGA debug USB port source is from internal USB 2.0 port of APU.

When the JP4 plug connects pins 2-3, the FPGA debug USB port source is from an external computer through the micro-USB port (USB2-DEUG connector).


The user needs to supply a standard USB micro USB to Type A cable for this connection.



Pin	Definition
1	NC
2	USB2_D-
3	USB2_D+
4	NC
5	GND


Fan Headers

There are two headers (CPUFAN and SYSFAN, 2.54mm pitch) on the motherboard. These fans can be speed detected/controlled and displayed in the Hardware Health Configuration section of the CMOS Setup. The fans are automatically turned off after the system enters S3, S4 or S5 mode.



Pin	Definition
1	GND
2	+12V
3	Sense
4	Control


Note:
The CPU fan cable can be either a 3-pin or a 4-pin connector.
Connect a 3-pin connector to pins 1, 2, and 3 on the mainboard connector.



Pin	Definition
1	GND
2	+12V
3	Sense

PSLP Power Control Jumper (JP1)


You can use JP1 (2.54mm pitch) to select to enable or disable the PSLP Power function.



Pin	Settings
1-2	Enable VCC_PSLP Power (Default)
2-3	Disable VCC_PSLP Power

PSFP Power Control Jumper (JP2)


You can use JP2 (2.54mm pitch) to select to enable or disable the PSFP Power function.



Pin	Settings
1-2	Enable VCC_PSFP Power (Default)
2-3	Disable VCC_PSFP Power

FUSE Power Control Jumper (JP3)

You can use JP3 (2.54mm pitch) to select to enable or disable the FUSE Power Control function.



Pin	Settings
1-2	Enable Burn the FUSE
2-3	Disable Burn the FUSE (Default)


USB Debug Port Selection Jumper of VE2302 (JP4)

The Versal AI Edge VE2302 FPGA is connected to a USB 2.0 interface via an FTDI FT4232 USB-to-JTAG/USB-UART device, providing access for debugging purposes.


There are two debug USB port that are selected by JP4.

When the JP4 plug connects pins 1-2, the FPGA debug USB port source is from internal USB 2.0 port of APU.

When the JP4 plug connects pins 2-3, the FPGA debug USB port source is from an external computer through the micro-USB port (USB2-DEUG connector).




Pin	Settings
1-2	Internal USB (Default)
2-3	External USB (connect from USB2-Deug)

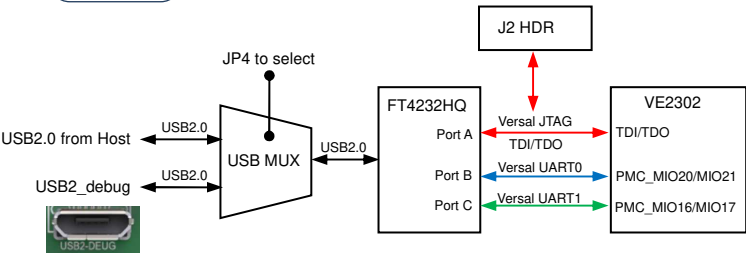

FT4232HQ (U73)	Versal Device (U15)
Port AD JTAG	VE2302 JTAG Chain
Port BD UART0	PMC UART0 (MIO20/21)
Port CD UART1	PMC UART1 (MIO16/17)

VE2302 MODE Selection Jumper (JP5)


You can use JP5 (2.54mm pitch) for VE2302 MODE selection.



Pin	Settings
NC	OSPI Mode (Default)
POP	JTAG Mode

ROM Write Protect mode Jumper (JP6)


You can use JP6 (2.54mm pitch) for ROM Write Protect mode selection.



Pin	Settings
1-2	Write Protect (Default)
2-3	Write Operations

Versal Power Control Jumper (JP7)


You can use JP7 (2.54mm pitch) for Versal Power Control.



Pin	Settings
1-2	Enable All of Versal Power (Default)
2-3	Disable All of Versal Power

Main Power Control Jumper (JP8)


You can use JP8 (2.54mm pitch) for Main Power Control.



Pin	Settings
1-2	Enable Main Power (Default)
2-3	Disable Main Power

Auto Power ON Jumper (JP9)


You can use JP9 (2.54mm pitch) to select to enable or disable the auto power on function.



Pin	Settings
1-2	Disable. Press power button manually to power on after power input is connected to power source
2-3	Enable. Automatically power on when power input is connected to power source (Default)

Clear CMOS Jumper (CMOS1)

This mainboard contains a jumper (CMOS1) that can clear CMOS data. If the CMOS data becomes corrupted or you forgot the supervisor or user password, clear the CMOS data to reconfigure the system back to the default values stored in the ROM BIOS.



- To clear CMOS data, please follow the steps below.
1. Turn off the system.
 2. Change the jumper from “1-2” to “2-3” position for a few seconds.
 3. Replace the jumper back to the “1-2” position.
 4. Turn on the system and hold down the key to enter BIOS Setup.

2-4 System LED Status Indicators

This mainboard provides three LEDs to indicate the system's status.

- STANDBY LED (LED10, Blue): When the System is in Standby Mode, this LED is on. This LED will remain on as long as the motherboard is receiving constant power.
- POWER LED (LED11, Green): When the System is powered on, this LED is on.
- DIMM LED (LED12, Yellow): When the Memory slot is functional, this LED is on.
- Versal DONE LED (LED6, Green): Indicates the AMD VE2302's done status.
- Versal ERROR LED (LED7, Red): Indicates the AMD VE2302's error status.



2-5 Minimum connection required to boot

A motherboard in its minimal boot configuration requires only the following:

- RAM: 8GB, 2 x 4GB DDR4
- Storage: a 512GB SSD
- Power Supply: 120W (Recommended)
- Monitor: HDMI or DP Monitor
- Keyboard and Mouse: USB Keyboard and Mouse


Chapter 3 Configuring the BIOS

This chapter provides information on the BIOS Setup program and allows you to configure the system for optimum use.

3-1 Select Boot Device

Select Boot Device Menu allows you to set the first boot device without entering BIOS Setup.

During Power On Self Test (POST), you can press the <**F7**> key to enter select boot device menu. The system will directly boot from the device configured in Boot Menu.

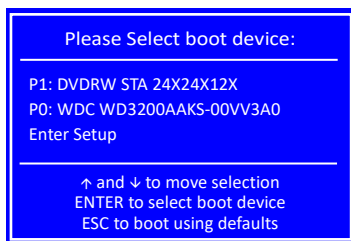

3-2 Enter BIOS Setup

The BIOS is the communication bridge between hardware and software. Correctly setting the BIOS parameters is critical to maintain optimal system performance.

Use the following procedure to change BIOS settings.

1. Power on the computer.
2. Press the <**Del**> or <**F2**> key to enter BIOS Setup during BIOS Power On Self Test (POST).

📌 Note1: You do not "need" to update the BIOS when receiving your system - it is shipped with working BIOS setting.

📌 Note2: It is strongly recommended that you do not change the default BIOS settings. Changing some settings could damage your computer.

 Note3: The BIOS options in this manual are for reference only. BIOS screens in manuals are usually the first BIOS version when the board is released and may be different from your purchased motherboard. Users are welcome to download the latest BIOS version from our official website.

Control Keys

Please check the following table for the function description of each Control key.

Control Key(s)	Function Description
→ / ←	Moves cursor left or right to select screens
↑ / ↓	Moves cursor up or down to select items
<Enter>	To bring up the selected item
+ / -	To change option for the selected items
<F1>	To display the General Help Screen
<F2>	To load previous values for all the settings
<F3>	To load optimized default values for all the settings
<F4>	To save changes and exit the setup utility
<ESC>	To jump to the Exit Screen or exit the current screen

3-3 Main Menu

When entering the Aptio Setup Utility, the main menu screen appears. This main menu includes the system overview and displays the basic system configuration, such as BIOS information, memory size and system date/time.

Aptio Setup - American Megatrends International, LLC.		
Main	Advanced	Chipset
BIOS Information		American Megatrends
BIOS Vendor		5.16
Core Version		UEFI 2.7; PI 1.6
Compliance		V024 (I899W024.ROM) x64
Project Version		10/22/2024 17:06:28
Build Date and Time		Administrator
Access Level		
Memory Information		
Total Memory		32768 MB (DDR4-2667)
System Date		[Fri 11/22/2024]
System Time		[10:45:26]
		Set the Date. Use Tab to switch between Date elements. Default Ranges: Year: 1998-9999 Months: 1-12 Days: Dependent on month Range of Year may vary.
		→←: Select Screen ↑↓: Select Item Enter: Select +/-: Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit
Ver. 2.21.1277 Copyright (C) 2024 American Megatrends International, LLC.		

BIOS Information

This field displays the current BIOS version, build date and ID information etc..

Memory Information

Displays current system memory size.

System Date

Allows you to set the system date. The format is <Day> <Month> <Date> <Year>.

[Day] Weekday from Sun. to Sat., this is automatically displayed by BIOS.

[Month] The month from 1 to 12.

[Date] The date from 1 to 31 can be keyed by numeric function keys.

[Year] The year can be adjusted by users.

System Time

Allows you to set the system time. The time format is

<hour>:<minute>:<second>.

3-4 Advanced Menu

The Advanced menu items allow you to change the settings for the CPU, USB and other system devices. Press <Enter> to display the configuration options.

Aptio Setup - American Megatrends International, LLC.

MainAdvancedChipsetSecurityBootSave & Exit

▶ Trusted Computing

▶ ACPI Settings

▶ Hardware Monitor

▶ RTC Wake Settings

▶ Serial Port Console Redirection

▶ CPU Configuration

▶ SATA Configuration

▶ SIO Configuration

▶ PCI Subsystem Settings

▶ USB Configuration

▶ Network Stack Configuration

▶ CSM Configuration

▶ NVMe Configuration

▶ Onboard Devices

▶ AMD CBS

▶ AMD PBS

Trusted Computing Settings.

→←: Select Screen
↑↓: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F4: Save and Exit
ESC: Exit

Ver. 2.21.1277 Copyright (C) 2024 American Megatrends International, LLC.

▶ **Trusted Computing**

Aptio Setup - American Megatrends International, LLC.

Advanced

TPM 2.0 Device Found

Firmware Version: 3:92

Vender: AMD

Security Device Support [Enable]

Active PCR banks SHA-1,SHA256

Available PCR banks SHA-1,SHA256

SHA-1 PCR Bank [Enabled]

SHA256 PCR Bank [Enabled]

Pending operation [None]

Platform Hierarchy [Enabled]

Storage Hierarchy [Enabled]

Endorsement Hierarchy [Enabled]

Physical Presence Spec Version [1.3]

TPM 2.0 Interface Type [CRB]

Enables or Disables BIOS support for security device. O.S. will not show Security Device. TCG EFI protocol and INT1A interface will not be available.

→←: Select Screen
↑↓: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F4: Save and Exit
ESC: Exit

Ver. 2.21.1277 Copyright (C) 2024 American Megatrends International, LLC.

Security Device Support

Enables or disables BIOS support for security device. O.S. will not show Security Device. TCG EFI protocol and INT1A interface will not be available. When enabled, the related items will appear.

Options: Enabled, Disabled.

SHA-1 PCR Bank

Enable or disable SHA-1 PCR Bank.

Options: Enabled, Disabled.

SHA256 PCR Bank

Enable or disable SHA256 PCR Bank.

Options: Enabled, Disabled.

Pending operation

Schedule an Operation for the Security Device.

NOTE: Your Computer will reboot during restart in order to change State of Security Device.

Options: None, TPM Clear.

Platform Hierarchy

Enables or disable Platform Hierarchy.

Options: Enabled, Disabled.

Storage Hierarchy

Enables or disable Storage Hierarchy.

Options: Enabled, Disabled.

Endorsement Hierarchy

Enables or disable Endorsement Hierarchy.

Options: Enabled, Disabled.

Physical Presence Spec Version

Select to Tell O.S. to support PPI Spec version 1.2 or 1.3. Note some HCK tests might not support 1.3.

Options: 1.2, 1.3.

► **ACPI Settings**

Aptio Setup - American Megatrends International, LLC.

Advanced

ACPI Settings

Enable ACPI Auto Configuration [Disabled]

Enable Hibernation [Enabled]

ACPI Sleep State [S3 (Suspend to RAM)]

Enables or Disables BIOS ACPI Auto Configuration.

→<: Select Screen

↑↓: Select Item

Enter: Select

+/-: Change Opt.

F1: General Help

F2: Previous Values

F3: Optimized Defaults

F4: Save and Exit

ESC: Exit

Ver. 2.21.1277 Copyright (C) 2024 American Megatrends International, LLC.

Enable ACPI Auto Configuration

This item allows you to enable or disable BIOS ACPI Auto Configuration.
Options: Enabled, Disabled.

Enable Hibernation

This item allows you to enable system ability to Hibernate (OS/S4 Sleep Sate).
This option may be not effective with some OS.
Options: Enabled, Disabled.

ACPI Sleep State

Allow you to select the power saving modes for ACPI function.
Options: Suspend Disabled, S3 (Suspend to RAM).

► **Hardware Monitor**

Aptio Setup - American Megatrends International, LLC.

Advanced

PC Health Status

Case Open Alarm

Reset Case Open Alarm Status

Case Opened

APU Fan Stopped Working Prompt

CPU ACPI Shutdown Temperature

EuP Function

WatchDog Timer

Time of watchdog timer (second)

Renew ACPI Watchdog Timer

[Disabled]

[Disabled]

[Disabled]

Yes

[Disabled]

[Disabled]

[Disabled]

[Disabled]

180

[Enabled]

Case open alarm

► SmartFan Configuration

APU Temperature

System Temperature

CPUFAN Speed

SYSFAN Speed

APU Vcore

APU NB

VCC3V

: +61 °C

: +36 °C

: 1758 RPM

: N/A

: +1.376 V

: +0.680 V

: +3.264 V

→←: Select Screen

↑↓: Select Item

Enter: Select

+/-: Change Opt.

F1: General Help

F2: Previous Values

F3: Optimized Defaults

F4: Save and Exit

ESC: Exit

Ver. 2.21.1277 Copyright (C) 2024 American Megatrends International, LLC.

Case Open Alarm

The chassis intrusion detection alerts you whenever your computer chassis was opened. If the case cover is opened, the system will automatically restart and appear prompt message (Shown below) during POST.



APU Fan Stopped Working Prompt

When the cooler is damaged or the APU fan connector is not connected even other factors affecting fan operation, the APU Fan will be stopped working. Meanwhile the system will automatically restart and appear prompt message (Shown below) during POST.

You can make a selection to enter the system.



APU ACPI Shutdown Temperature

If the APU temperature is higher than ACPI shutdown temperature, the system will shut down. When set to "Enabled" option. The following items will appear.

Shutdown Temperature

Allows you set a value of temperature for system shutdown.

The default is 80.

EuP Function

Enables the EuP (Energy Using Products) function, allows BIOS to switch off some power at S5 state to get system ready for the EuP requirement to reduce power consumption.

Options: Enabled, Disabled.

WatchDog Timer

Allow you to enable WatchDog timer expires during OS boot. When set to "Enabled" option. The following items will appear.

Time of watchdog timer (second)

Allows you set a period of seconds for watchdog timer.

Options: 5 ~ 255 second.

► **Smart Fan Configuration**

Aptio Setup - American Megatrends International, LLC.		
Advanced		
SmartFan Configuration		Fan Mode Setting
CPUFan Mode Setting	[SmartFan]	
Highest Fan Speed In Percentage	100	
1st Temperature Threshold (°C)	80	
2nd Fan Speed In Percentage	70	
2nd Temperature Threshold (°C)	70	
3rd Fan Speed In Percentage	50	→←: Select Screen
3rd Temperature Threshold (°C)	55	↑↓: Select Item
4th Fan Speed In Percentage	30	Enter: Select
4th Temperature Threshold (°C)	40	+/-: Change Opt.
Lowest Fan Speed In Percentage	10	F1: General Help
System Fan Mode Setting	[SmartFan]	F2: Previous Values
Highest Fan Speed In Percentage	100	F3: Optimized Defaults
1st Temperature Threshold (°C)	80	F4: Save and Exit
2nd Fan Speed In Percentage	70	ESC: Exit
2nd Temperature Threshold (°C)	70	
3rd Fan Speed In Percentage	50	
3rd Temperature Threshold (°C)	55	
4th Fan Speed In Percentage	30	
4th Temperature Threshold (°C)	40	
Lowest Fan Speed In Percentage	10	

Ver. 2.21.1277 Copyright (C) 2024 American Megatrends International, LLC.

APUFan Mode Setting / System Fan Mode Setting

This item controls the speed of the various fans on the motherboard.

SmartFan: When you want the speed of the fans automatically controlled based on temperature.

Manual By DutyCycle: To set the fan speed to a constant rate, the speed from 0% to 100%.

Manual By RPM: This item sets the fan speed at a fixed.

APU / System Temperature

Displays the current APU / System Temperature.

APUFAN Speed / SYSFAN Speed

Displays the current APU / System Fan Speeds.

APU Vcore / APU NB / VCC3V

The current voltages are automatically detected and displayed by the system.

► **RTC Wake Settings**

Aptio Setup - American Megatrends International, LLC.

Advanced

Wake system at specific Time	[Disabled]	Enable or disable System wake on alarm event. When enabled, System will wake on the hr::min::sec specified.
Wake System duration after shutdown	[Disabled]	

→←: Select Screen

↑↓: Select Item

Enter: Select

+/-: Change Opt.

F1: General Help

F2: Previous Values

F3: Optimized Defaults

F4: Save and Exit

ESC: Exit

Ver. 2.21.1277 Copyright (C) 2024 American Megatrends International, LLC.

Wake system at specific Time

Enable or disable system wakeup on alarm event. When enabled, the related items will appear.

Options: Enabled, Disabled.

Wake up days of the week

This item allows you to select days of the week to wake up the system.

Options: Every day, Selective.

Wake up hour / Wake up minute

This item allows you to set the system to wake up at the hr:min specified.

Wake System duration after shutdown

When enabled, system will wake up at current time + Increment in minutes(s) after shutdown. When enabled, the related items will appear.


Options: Enabled, Disabled.

Duration (minute)

This item allows you to set duration time to wake system.

Options: 1 ~ 30.

► **Serial Port Console Redirection**

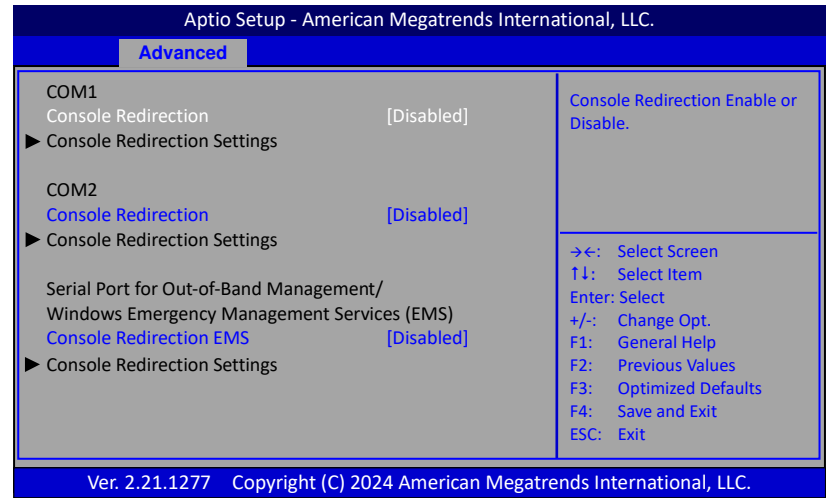

COM1 Console Redirection

Enable or disable console redirection for COM1. When enabled, the related items will appear.

Options: Enabled, Disabled.

COM2 Console Redirection

Enable or disable console redirection for COM2. When enabled, the related items will appear.


Options: Enabled, Disabled.

Console Redirection EMS

Enable or disable console redirection for EMS. When enabled, the related items will appear.

Options: Enabled, Disabled.

► **CPU Configuration**

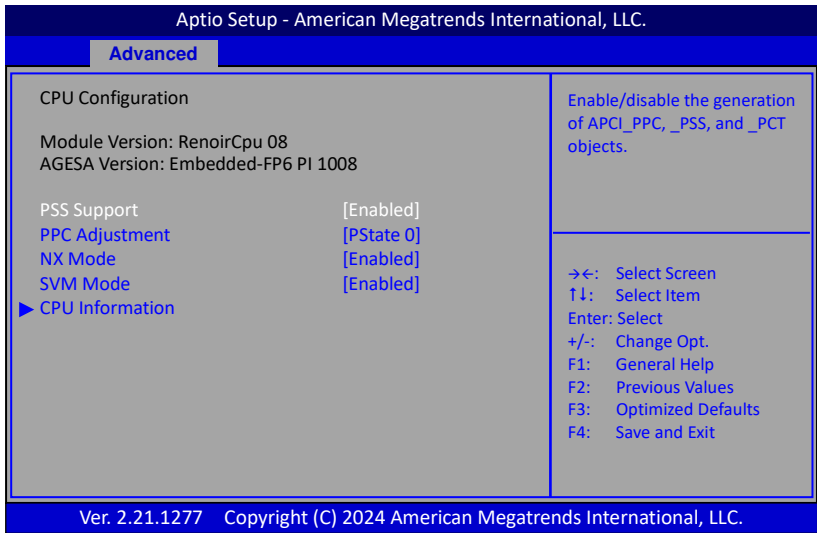

PSS Support

Enable/disable the generation of APCI_PPC, _PSS, and _PCT objects.

Options: Enabled, Disabled.

PPC Adjustment

Allows you to adjust _PPC object.

Options: PState 0, PState 1, PState 2.

NX Mode

Enable or disable No-execute page protection function.

Options: Enabled, Disabled.

SVM Mode

Enables the CPU SVM (Secure Virtual Machine) function.

Options: Enabled, Disabled.

► **CPU Information**

Displays current processor information.

Aptio Setup - American Megatrends International, LLC.

Advanced

Socket0: AMD Ryzen Embedded V2748 with Radeon Graphics
8 Core(s) Running @ 2936 MHZ 1218 mV
Processor Family: 17h
Processor Model: 60h-6Fh
CPUID: 00810F01
Current Speed:2900 MHZ
Min Speed:1400 MHZ
Microcode Patch Level: 860010C

----- Cache Per Core -----
L1 Instruction Cache: 32 KB/8-way
L1 Data Cache: 32 KB/8-way
L2 Cache: 512 KB/8-way
Total L3 Cache per Socket: 8 MB/16-way

Ver. 2.21.1277 Copyright (C) 2024 American Megatrends International, LLC.

► **SATA Configuration**

Aptio Setup - American Megatrends International, LLC.

Advanced

SATA Configuration

SATA Controller 0:
Port 1: SAMSUNG SSD 885 (256.0GB)

SATA Controller 1:
Port 0 (M.2 M-Key) Not Present

→←: Select Screen
↑↓: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F4: Save and Exit
ESC: Exit

Ver. 2.21.1277 Copyright (C) 2024 American Megatrends International, LLC.

SATA Controller 0 / SATA Controller 1

This field shows SATA ports connection state.

► SIO Configuration

Aptio Setup - American Megatrends International, LLC.

Advanced

AMD SIO Driver Version: A5.17.00

Super IO Chip Logical Device(s) Configuration

► [*Active*] Serial Port 1

► [*Active*] Serial Port 2

WARNING: Logical Device state on the left side of the control, reflects the current Logical Device state. Changes made during Setup Session will be shown after you restart the system.

View and Set Basic properties of the SIO Logical device. Like IO Base, IRQ Range, DMA Channel and Device Mode.

→←: Select Screen
↑↓: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F4: Save and Exit
ESC: Exit

Ver. 2.21.1277 Copyright (C) 2024 American Megatrends International, LLC.

[*Active*] Serial Port 1/[*Active*] Serial Port 2

View and Set Basic properties of the SIO Logical device. Like IO Base, IRQ Range, DMA Channel and Device Mode.

► PCI Subsystem Settings

Aptio Setup - American Megatrends International, LLC.

Advanced

AMI PCI Driver Version: A5.01.23

PCI Devices Common Settings for all devices:

Above 4G Decoding [Enabled]

SR-IOV Support [Disabled]

BME DMA Mitigation [Disabled]

PCI Hot-Plug Settings [Enabled]

Change Settings of the Following PCI Devices:

WARNING: Changing PCI Device(s) settings may have unwanted side effects! System may HANG! PROCEED WITH CAUTION.

Globally Enables or disables 64bit capable device to be decoded in above 4G address space (only if system supports 64bit PCI decoding).

→←: Select Screen
↑↓: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults

Ver. 2.21.1277 Copyright (C) 2024 American Megatrends International, LLC.

Above 4G Decoding

Enable or disable 64bit capable device to be decoded in above 4G address space (only if system supports 64bit PCI decoding).

Options: Enabled, Disabled.

SR-IOV Support

If system has SR-IOV capable PCIe devices, this option enables or disables Single Root IO Virtualization support.

Options: Enabled, Disabled.

BME DMA Mitigation

Re-enable bus master attribute disabled during PCI enumeration for PCI bridges after SMM locked.

Options: Enabled, Disabled.

PCI Hot-Plug Settings

These fields are for enable or disable PCI Express Devices related ordering.

► **USB Configuration**

Aptio Setup - American Megatrends International, LLC.

Advanced

USB Configuration		Enables Legacy USB support. AUTO option disables legacy support if no USB devices are connected. DISABLED option will keep USB devices available only for EFI applications.
USB Module Version	28	
USB controllers: 2 XHCIs		
USB Devices: 1 Keyboard, 1 Mouse		
Legacy USB Support	[Enabled]	
XHCI Hand-off		→←: Select Screen ↑↓: Select Item Enter: Select +/-: Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save and Exit ESC: Exit
USB Mass Storage Driver Support		
USB Hardware delays and time-outs:		
USB transfer time-out	[20 sec]	
Device reset time-out	[20 sec]	
Device power-up delay	[Auto]	

Ver. 2.21.1277 Copyright (C) 2024 American Megatrends International, LLC.

Legacy USB Support

Allows you to select legacy support for USB devices.

Enabled: Enables Legacy USB support.

Disabled: Keep USB devices available only for EFI application.

Auto: Disables legacy support if no USB devices are connected.

XHCI Hand-off

This is a workaround for OSeS without XHCI hand-off support. The XHCI ownership change should be claimed by XHCI driver.

Options: Enabled, Disabled.

USB Mass Storage Driver Support

Allows you to enable or disable USB Mass Storage Driver support.

Options: Enabled, Disabled.

USB transfer time-out

The time-out value for control, bulk, and interrupt transfers.

Options: 1 sec, 5 sec, 10 sec, 20 sec.

Device reset time-out

Sets USB mass storage devices start unit command time-out.

Options: 10 sec, 20 sec, 30 sec, 40 sec.

Device power-up delay

Maximum time the device will take before it properly reports itself to the Host controller. 'Auto' uses default values: for a Root port it is 100ms, for a Hub port the delay is taken from Hub descriptor.

Options: Auto, Manual.

Device power-up delay in seconds

This item is used to set a wait time in seconds for device power-up delay.

Options: 1 ~ 40.

► Network Stack Configuration

Aptio Setup - American Megatrends International, LLC.

Advanced

Network Stack	[Enabled]	Enable/Disable UEFI Network Stack
Ipv4 PXE Support	[Enabled]	
Ipv4 HTTP Support	[Disabled]	
Ipv6 PXE Support	[Disabled]	
Ipv6 HTTP Support	[Disabled]	
PXE boot wait time	0	
Media detect count	1	

→←: Select Screen

↑↓: Select Item

Enter: Select

+/-: Change Opt.

F1: General Help

F2: Previous Values

F3: Optimized Defaults

F4: Save and Exit

ESC: Exit

Ver. 2.21.1277 Copyright (C) 2024 American Megatrends International, LLC.

Network Stack

This item is used for network boot in UEFI mode. When enabled, the related items will appear.

Options: Enabled, Disabled.

Ipv4 PXE Support

This item is used to enable or disable the Ipv4 PXE boot support. If disabled, Ipv4 PXE boot option will not be available.

Options: Enabled, Disabled.

Ipv4 HTTP Support

This item is used to enable or disable the Ipv4 HTTP boot support. If disabled, Ipv4 HTTP boot option will not be available.

Options: Enabled, Disabled.

Ipv6 PXE Support

This item is used to enable or disable the Ipv6 PXE boot support. If disabled, Ipv6 PXE boot option will not be available.

Options: Enabled, Disabled.

Ipv6 HTTP Support

This item is used to enable or disable the Ipv6 HTTP boot support. If disabled, Ipv6 HTTP boot option will not be available.

Options: Enabled, Disabled.

PXE boot wait time

This item is used to set a wait time in seconds for PXE boot. Press ESC key to abort the PXE boot.

Options: 0~5 sec.

Media detect count

Number of times presence of media will be checked.

► **CSM Configuration**

Aptio Setup - American Megatrends International, LLC.		
Advanced		
Compatibility Support Module Configuration		Enable/Disable CSM Support
CSM Support	[Enabled]	→←: Select Screen ↑↓: Select Item Enter: Select +/-: Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save and Exit ESC: Exit
CSM16 Module Version	07.84	
GateA20 Active	[Upon Request]	
Option ROM Messages	[Force BIOS]	
INT19 Trap Response	[Immediate]	
HDD Connection Order	[Adjust]	
Boot option filter	[UEFI and Legacy]	
Option ROM execution		
Network	[Legacy]	
Storage	[Legacy]	
Video	[Legacy]	
Other PCI devices	[UEFI]	
Ver. 2.21.1277 Copyright (C) 2024 American Megatrends International, LLC.		

CSM Support

This item allows enable or disable the CSM (Compatibility Support Module) configuration.

Options: Enabled, Disabled.

GateA20 Active

This feature determines how Gate A20 is used to address memory above 1MB. Upon Request: GA20 can be disabled using BIOS services.

Always: Do not allow disabling GA20.

Option ROM Message

Sets display mode for Option ROM.

Force BIOS: To force to a BIOS-compatible output. This will show the option ROM messages.

Keep Current: To keep the current video mode. This will suppress option ROM messages. Option ROMs requiring interactive inputs may not work properly in this mode.

INT19 Trap Response

This item allows BIOS reaction on INT19 trapping by option ROM.

Immediate: Execute the trap right away.

Postponed: Execute the trap during legacy boot.

HDD Connection Order

Some OS require HDD handles to adjusted, i.e. OS is installed on drive 80h.

Options: Adjust, Keep.


Boot option filter

This option controls what devices system can boot to UEFI or Legacy.
Options: UEFI and Legacy, Legacy only, UEFI only.

Option ROM execution


This field controls the execution policy for Network, Storage, Video and other PCI devices.
Options: Do not launch, Legacy, UEFI.

► **NVMe Configuration**

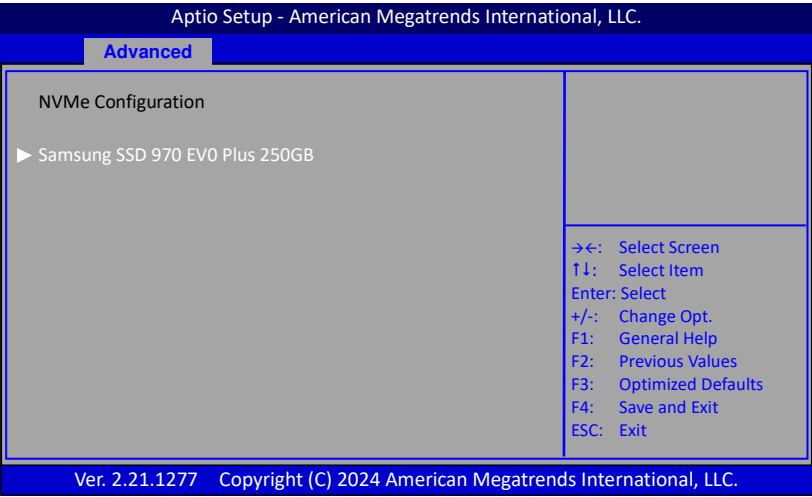

This field is displayed the NVMe controller and Drive information.

► Onboard Devices

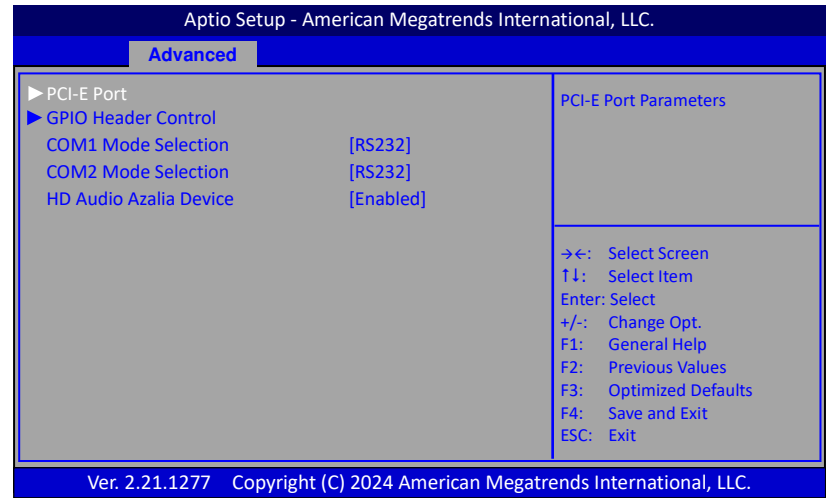

PCI-E Port

PE1 Slot (PCIE x8)

Allows you to enable or disable the PE1 Slot.

Options: Disabled, Enabled.

ASM Mode Control

NB Root Port ASPM Mode Control.

Options: Disabled, L0S Entry, L1 Entry, L0S and L1 Entry, Auto.

Hotplug Mode Control

NB Root Hotplug Mode Control.

Options: Disabled, Hotplug Basic, Hotplug Server, Hotplug Enhanced, Hotplug Inboard, Auto.

Onboard 2.5 Gigabit LAN (PCIE x1)

Allows you to enable or disable the onboard LAN controller.

Options: Enabled, Disabled.

ASM Mode Control

NB Root Port ASPM Mode Control.

Options: Disabled, L0S Entry, L1 Entry, L0S and L1 Entry, Auto.

Hotplug Mode Control

NB Root Hotplug Mode Control.

Options: Disabled, Hotplug Basic, Hotplug Server, Hotplug Enhanced, Hotplug Inboard, Auto.

M.2 E-Key Socket (PCIe x1)

Allows you to enable or disable the M.2 E-Key Socket.

Options: Disabled, Enabled.

ASM Mode Control

NB Root Port ASPM Mode Control.

Options: Disabled, L0S Entry, L1 Entry, L0S and L1 Entry, Auto.

Hotplug Mode Control

NB Root Hotplug Mode Control.

Options: Disabled, Hotplug Basic, Hotplug Server, Hotplug Enhanced, Hotplug Inboard, Auto.

XILINX Versal VE2302 (PCIe 4)

Allows you to enable or disable the onboard XILINX Versal VE2302.

Options: Enabled, Disabled.

ASM Mode Control

NB Root Port ASPM Mode Control.

Options: Disabled, L0S Entry, L1 Entry, L0S and L1 Entry, Auto.

Hotplug Mode Control

NB Root Hotplug Mode Control.

Options: Disabled, Hotplug Basic, Hotplug Server, Hotplug Enhanced, Hotplug Inboard, Auto.

M.2 M-Key Socket (PCIe x4)

Allows you to enable or disable the M.2 M-Key Socket.

Options: Disabled, Enabled.

ASM Mode Control

NB Root Port ASPM Mode Control.

Options: Disabled, L0S Entry, L1 Entry, L0S and L1 Entry, Auto.

Hotplug Mode Control

NB Root Hotplug Mode Control.

Options: Disabled, Hotplug Basic, Hotplug Server, Hotplug Enhanced, Hotplug Inboard, Auto.

GPIO Header Control

This sub-item is for GPIO (General-purpose input/output) header control, each GPIO is accessible via a connector pin.


COM1 Mode Selection / COM2 Mode Selection

Allows you to select the operating mode for the COM1/COM2 port.

HD Audio Azalia Device

Allows you to enable or disable the onboard High Definition Audio controller.
Options: Disabled, Enabled.

► **AMD CBS**

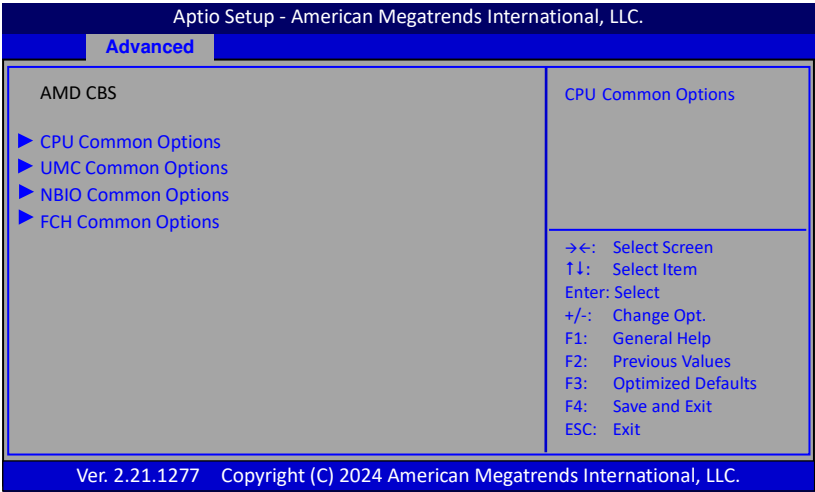

► **CPU Common Options**

Core Performance Boost

Allows you set the Core Performance Boost.
Options: Disabled, Auto.


Global C-State Control

Allows you controls IO based C-State generation and DF C-states.
Options: Enabled, Disabled, Auto.

▶ UMC Common Options

DDR4 Common Options

DRAM Timing Configuration

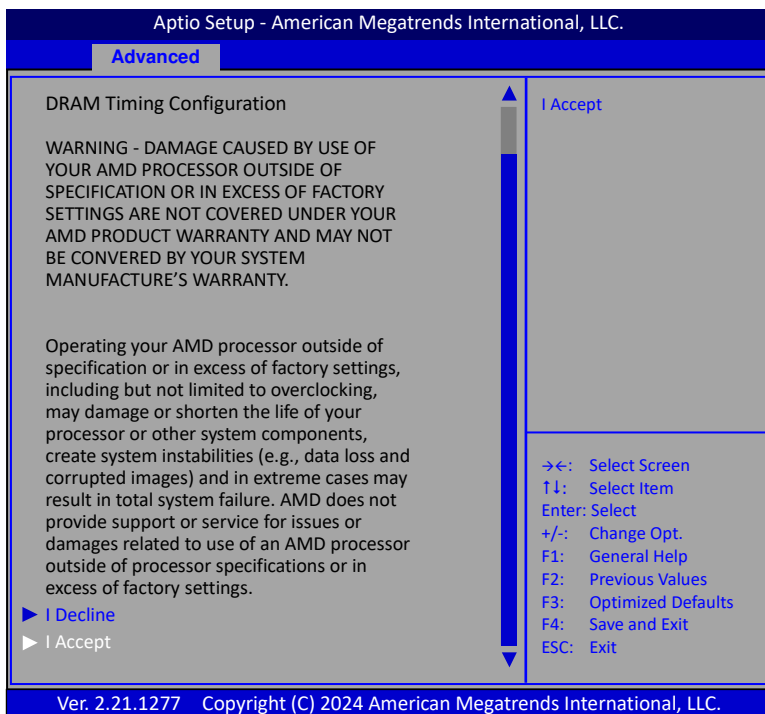

Select "I Accept" item to enter the overclock function.

Overclock

When set to "Enabled", allow you to individually set overclock parameters.

Options: Auto, Enabled.

Memory Clock Speed

Recommend to select and follow below items option only.

1200MHz → 2400MHz

1600MHz → 3200MHz

Note:

Please attention DRAM timing configuration "WARNING" description. If there is no boot after setting, please to do CMOS clear.

► NBIO Common Options

IOMMU

This item allows you to enable or disable the IOMMU (Input/Output Memory Management Unit).

Options: Disabled, Enabled, Auto.

PSPP Policy

This item allows you to select PCIe speed power policy.

Options: Disabled, Balanced, Auto.

GFX Configuration

iGPU Configuration

Allows you to select the UMA mode.

Options: Auto, iGPU Disabled, UMA_SPECIFIED, UMA_AUTO, UMA_GAME_OPTIMIZED,.

UMA Frame buffer Size

This item will only appear when “iGPU Configuration” item is set to “UMA_SPECIFIED” option. It controls the amount of system memory that is allocated to the integrated graphics processor.

Options: Auto, 64M, 80M, 96M, 128M, 256M, 384M, 512M, 768M, 1G, 2G, 3G, 4G, 8G, 16G.

Display Resolution

This item will only appear when “iGPU Configuration” item is set to “UMA_AUTO” option. It allows you select the display resolution.

Options: 1920x1080 and below, 2560x1600, 3840x2160, Auto.

UMA Version

Allows you to select the UMA version.

Options: Legacy, Non-Legacy, Hybrid Secure, Auto.

Audio Configuration

DP/HDMI Audio

Allows you to enable or disable the Integrated HD Audio Controller.

Options: Disabled, Enabled, Auto

SMU Common Options

System Configuration

This item allows you to select the System Configuration.

Options:

10W POR Configuration / 15W POR Configuration

25W POR Configuration / 35W POR Configuration

45W POR Configuration / Auto

Warning: Select System Configuration may cause the system to hang, as some System Configuration may not be supported by your OPN.

► FCH Common Options

AC Power Loss Options

Ac Loss Control

Enables your computer to automatically restart or return to its last operating status after power returns from a power failure.

Options: Always Off, Always On, Previous.


I2C Configuration Options

I2C 0 Enable / I2C 1 Enable / I2C 2 Enable

This item allows you to select the I2C Configuration.


Options: Auto, Disabled, Enabled.

► AMD PBS

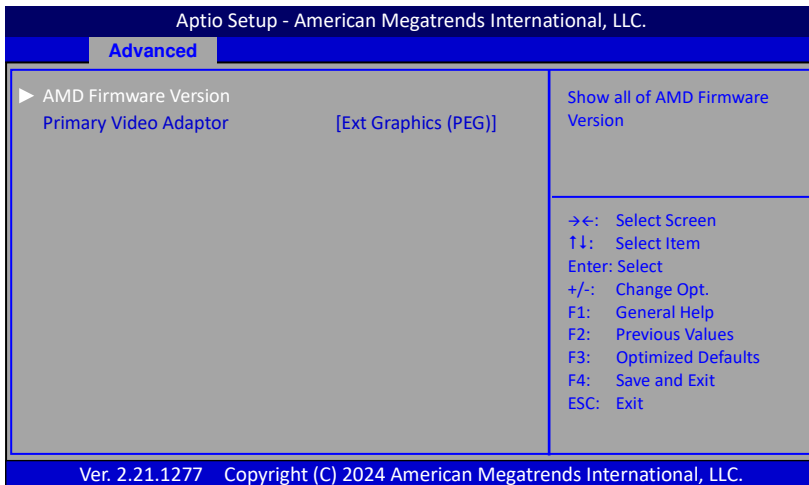

► **AMD Firmware Version**

Show all of AMD Firmware Version.

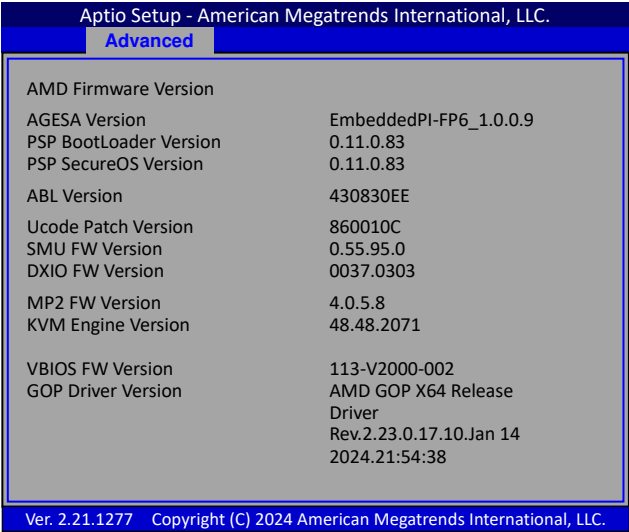


Primary Video Adaptor


This item allows you to select Internal or External graphics.
Options: Int Graphics (IGD), Ext Graphics (PEG).

3-5 Chipset Menu

The chipset menu items allow you to change the advanced chipset settings. Press <Enter> to display the sub-menu.

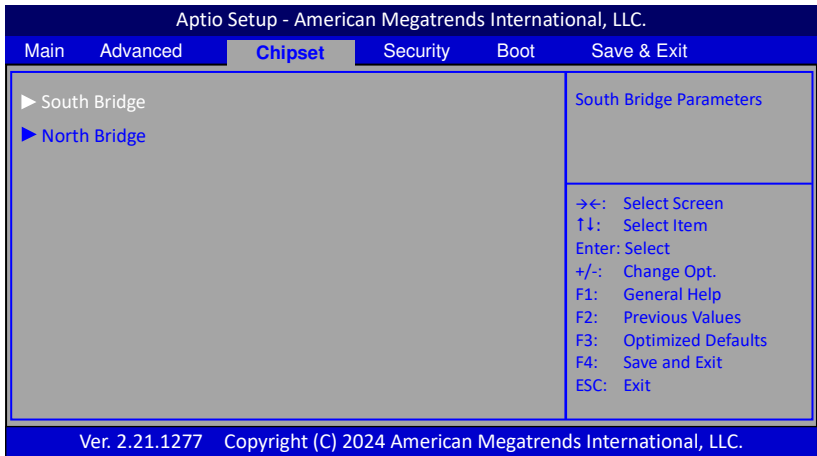

▶ South Bridge

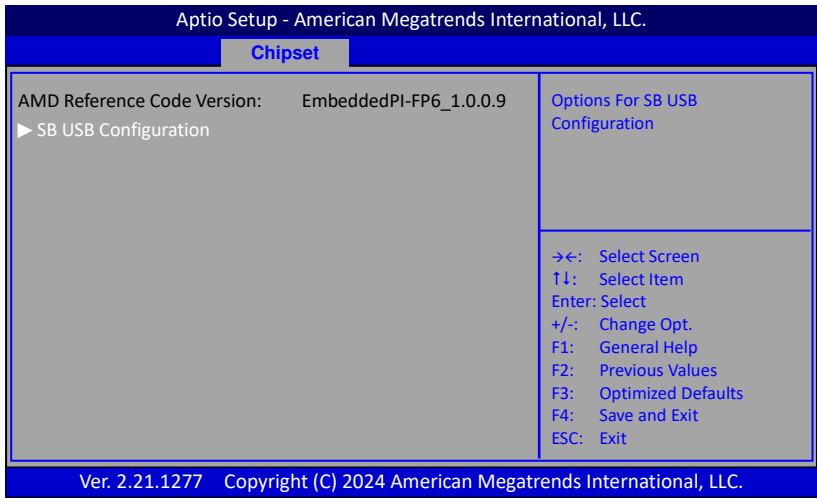

▶ SB USB Configuration

**USB3.2 TYPE-C Port /
USB3.2 Port (Blue, Top) / USB3.2 Port (Blue, Bottom) /**

**USB2.0 Port (Black, Top) / USB2.0 Port (Black, Bottom) /
USB2.0 Header / M.2 E-KEY USB Port**

These items allow you to enable or disable USB ports.

► **North Bridge**

Aptio Setup - American Megatrends International, LLC.

Chipset

North Bridge Configuration

Memory Information

Total Memory: 32768 MB (DDR4-2667)

► Memory Information

View Information related to Socket 0

→←: Select Screen
↑↓: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F4: Save and Exit
ESC: Exit

Ver. 2.21.1277 Copyright (C) 2024 American Megatrends International, LLC.

► **Memory Information**

Displays the memory related information.

Aptio Setup - American Megatrends International, LLC.

Chipset

Memory Information

Starting Address: 0 KB
Ending Address: 33554431 KB


Dimm1:
Dimm0: size=16384 MB
Current speed=2667 MHz
Max speed=3200 MHz

Dimm0:
Dimm0: size=16384 MB
Current speed=2667 MHz
Max speed=3200 MHz

Ver. 2.21.1277 Copyright (C) 2024 American Megatrends International, LLC.

3-6 Security Menu

The Security menu allows you to change the system security settings.

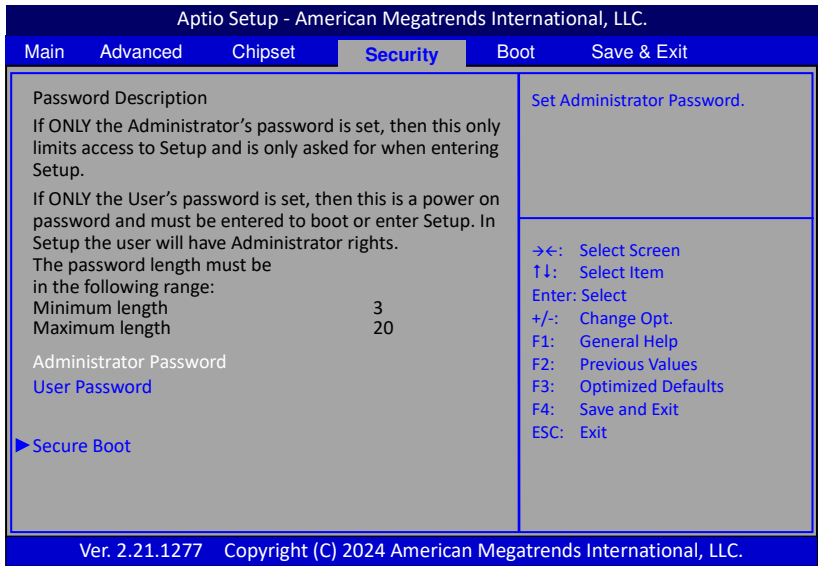

Administrator Password

This function is used to set, change or delete the Administrator password. If there is already a password installed, the system asks for this first. To clear a password, simply enter nothing and acknowledge by pressing Return. To set a password, enter it twice and acknowledge by pressing Return. The password must be 3 to 20 characters long.

User Password

This function is used to set, change or delete the User password. If there is already a password installed, the system asks for this first. To clear a password, simply enter nothing and acknowledge by pressing Return. To set a password, enter it twice and acknowledge by pressing Return. The password must be 3 to 20 characters long.

Secure Boot

Secure Boot feature is Active if Secure Boot is Enabled. Platform Key (PK) is enrolled and the system is in user mode. The mode change requires platform reset.

3-7 Boot Menu

The Boot menu is used to configure the boot settings and the boot priority.

Aptio Setup - American Megatrends International, LLC.					
Main	Advanced	Chipset	Security	Boot	Save & Exit
Boot Configuration				Number of seconds to wait for setup activation key. 65535(0xFFFF) means indefinite waiting.	
Setup Prompt Timeout				1	
Bootup NumLock State				[On]	
Full Screen Logo				[Enabled]	
Boot Option Priorities					
Boot Option #1				[P1: Samsung SSD 850 PRO 256G]	
Network Device BBS Priorities				→←: Select Screen ↑↓: Select Item Enter: Select +/-: Change Opt. F1: General Help F3: Optimized Defaults F4: Save and Exit ESC: Exit	
Ver. 2.21.1277 Copyright (C) 2024 American Megatrends International, LLC.					

Setup Prompt Timeout

This is used to set an additional time the POST should wait for the operator to press the key to enter setup. The time is entered in seconds.

Bootup NumLock State

Selects the state of the keyboard’s Numlock function after POST.

Options: On, Off.

Full Screen Logo

This item allows you to enable or disable the full screen logo display feature.

Options: Enabled, Disabled.

Boot Option Priorities

These items specify the boot device priority sequence of the available devices.

The number of device items that appears on the screen depends on the number of devices installed in the system.

Hard Drive BBS Priorities


Allows you to configure the boot order for a specific Hard Drive device class.

Network Device BBS Priorities

Allows you to configure the boot order for a specific Network device class.

3-8 Save & Exit Menu

The Save & Exit menu allows you to load the optimal default values for BIOS, and save or discard your changes to the BIOS items.

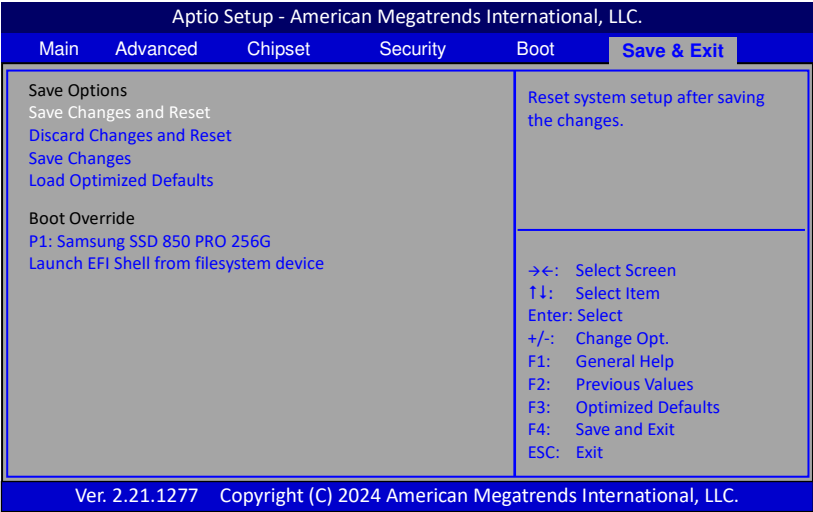

Save Options

Allows you to save the options you made.

Save Changes and Reset

This resets system after saving the changes.

Discard Changes and Reset

This resets system without saving the changes.

Save Changes

Allows you to save the changes you made.

Load Optimized Defaults

The Load default values are the factory settings of this motherboard.

Boot Override

This group of functions includes a list, each of them corresponding to one device within the boot order. Select a drive to immediately boot that device regardless of the current boot order.

Launch EFI Shell from filesystem device

Attempts to launch EFI Shell application (Shellx64.efi) form one of the available filesystem devices.

Chapter 4 Firmware and Driver Installation

After the operating system has been installed, you need to install the software and drivers for this mainboard. The OSPI firmware may also need to be updated.

Please visit <http://www.sapphiretech.com> or <http://www.amd.com> to download the latest driver.


Appendix A: BIOS Update

Please refer the following steps for BIOS update.

1. Please download the latest BIOS version from this link.
www.sappphire.com/xxxxxxxxxxxxxx
2. After downloading the compressed file, there are four files upon extracting the archive.

 afulnx_64	2024/2/2 上午 07:11	檔案	1,160 KB
 flash.sh	2024/2/2 上午 07:11	SH 檔案	1 KB
 I907W021.rom	2024/2/2 上午 07:11	ROM 檔案	8,192 KB
 readme	2024/2/2 上午 07:11	文字文件	6 KB

3. Open a terminal window in this folder and execute the command #
sudo ./flash.sh
4. Update completed, as shown in the following picture.

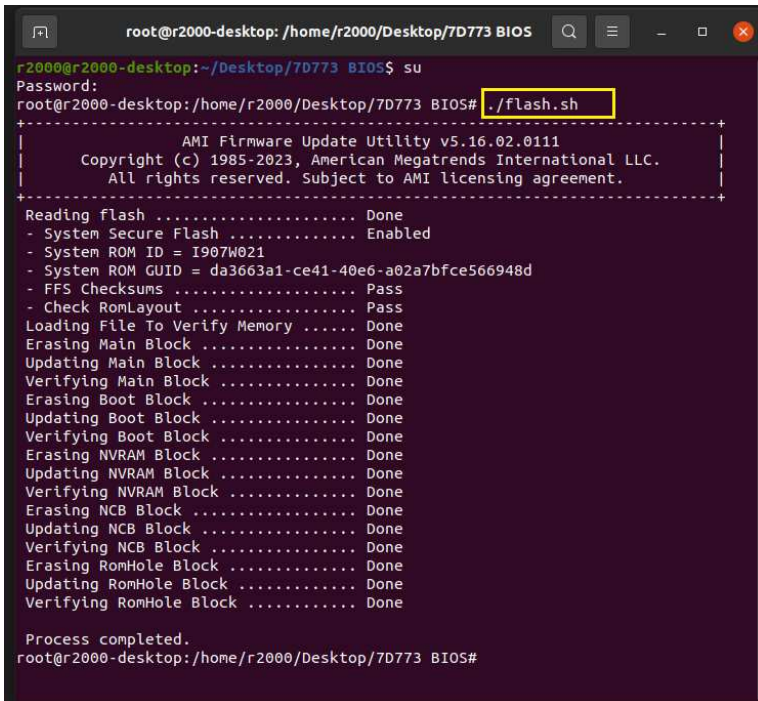A terminal window titled 'root@r2000-desktop: /home/r2000/Desktop/7D773 BIOS' is shown. The user has entered 'su' and then './flash.sh'. The output displays the AMI Firmware Update Utility v5.16.02.0111, copyright 1985-2023, American Megatrends International LLC. The update process includes reading the flash, verifying system secure flash, ROM ID, and GUID, checking checksums, and updating various blocks (Main, Boot, NVRAM, NCB, RomHole) with verification at each step. The process completes successfully.

```
root@r2000-desktop: /home/r2000/Desktop/7D773 BIOS
r2000@r2000-desktop:~/Desktop/7D773 BIOS$ su
Password:
root@r2000-desktop: /home/r2000/Desktop/7D773 BIOS# ./flash.sh
-----+-----
|               AMI Firmware Update Utility v5.16.02.0111               |
|   Copyright (c) 1985-2023, American Megatrends International LLC.   |
|   All rights reserved. Subject to AMI licensing agreement.           |
+-----+-----
Reading flash ..... Done
- System Secure Flash ..... Enabled
- System ROM ID = I907W021
- System ROM GUID = da3663a1-ce41-40e6-a02a7bfce566948d
- FFS Checksums ..... Pass
- Check RomLayout ..... Pass
Loading File To Verify Memory ..... Done
Erasing Main Block ..... Done
Updating Main Block ..... Done
Verifying Main Block ..... Done
Erasing Boot Block ..... Done
Updating Boot Block ..... Done
Verifying Boot Block ..... Done
Erasing NVRAM Block ..... Done
Updating NVRAM Block ..... Done
Verifying NVRAM Block ..... Done
Erasing NCB Block ..... Done
Updating NCB Block ..... Done
Verifying NCB Block ..... Done
Erasing RomHole Block ..... Done
Updating RomHole Block ..... Done
Verifying RomHole Block ..... Done

Process completed.
root@r2000-desktop: /home/r2000/Desktop/7D773 BIOS#
```

Appendix B: Qualified Vendors List

Qualified Vendors List for Memory modules

➤ DDR4 2133 Memory modules

Vendor	Module P/N	Size	Component	Voltage	DIMM socket support	
					1 DIMM	2 DIMM
ADATA	AD4S2133W4G15-BSSD	4GB	K4A4G085WD	1.2V	✓	✓
GeIL	GS44GB2133C15SC	4GB	GeIL 512X8DDR4	1.2V	✓	✓
GOODRAM	GR4S4GB213S8C	4GB	K4A4G085WE	1.2V	✓	✓
Innodisk	M4S0-4GSSNCRG	4GB	K4A4G085WD	1.2V	✓	✓
SMART	SH5126SO451851-HA	4GB	H5AN4G8NAFR TFC	1.2V	✓	✓
Transcend	TS512M5H64V1H	4GB	K4A4G085WD	1.2V	✓	✓
Transcend	TS512M5H72V1H ECC	4GB	K4A4G085WD	1.2V	✓	✓
TEAM	TED44G2133C15-SBK	4GB	T4D5128HT-21	1.2V	✓	✓
GeIL	GS48GB2133C15SC	8GB	GeIL 512X8DDR4	1.2V	✓	✓
Innodisk	M4S0-8GSSOCRG	8GB	K4A4G085WD	1.2V	✓	✓
SMART	SH1026SO451851-HA	8GB	H5AN4G8NAFR TFC	1.2V	✓	✓
SMART	SH1026SO410851-SB	8GB	K4A8G08 5WB	1.2V	✓	✓
Transcend	TS1GSH64V1H	8GB	K4A4G08 5WD	1.2V	✓	✓
SMART	SH2046SO410851-HM	16GB	H5AN8G8NMFR TFC	1.2V	✓	✓

➤ DDR4 2400 Memory modules

Vendor	Module P/N	Size	Component	Voltage	DIMM socket support	
					1 DIMM	2 DIMM
SMART	SH5126SO451672-HA	4GB	H5AN8G8NAFR UHC	1.2V	✓	✓
SMART	SH5127SO451872-HA ECC	4GB	H5AN4G8NAFR UHC	1.2V	✓	✓
GOODRAM	GR4S4G240S8C-SERC	4GB	SEC 819 K4A4G08	1.2V	✓	✓
Kingston	CBD24D457S8MB-4	4GB	7CB75 D9TGG	1.2V	✓	✓
SAMSUNG	M471A5244CB0-CRC	4GB	SEC 801 K4A8G16	1.2V	✓	✓
GOODRAM	GR4S8G240S8C-SBRC	8GB	SEC 731 K4A8G08	1.2V	✓	✓
Kingston	CBD24D457S8MB-8	8GB	6RB77 D9TGG	1.2V	✓	✓
Kingston	CBD24D457S8ME-8	8GB	7QE75 D9VPP	1.2V	✓	✓
Kingston	KVR24S17S8/8	8GB	7SE75 D9VPP	1.2V	✓	✓
SMART	SH1026SO410872-HA	8GB	H5AN8G8NAFR UHC	1.2V	✓	✓
SMART	SH2046SO410872-HM	16GB	H5AN8G8NAFR UHC	1.2V	✓	✓
Kingston	KTL-TN424E/16GB ECC	16GB	H5AN8G8NAFR UHC	1.2V	✓	✓

➤ **DDR4 2666 Memory modules**

Vendor	Module P/N	Size	Component	Voltage	DIMM socket support	
					1 DIMM	2 DIMM
TEAMGROUP	TED44G2666C19-SBK	4GB	Team Elite TD5128KT-266	1.2V	✓	✓
SMART	SH1026SO410893-SC	8GB	SWT0A10805383FC175	1.2V	✓	✓
SAMSUNG	M471A1K43CB1-CTD	8GB	SEC 843 K4A8608 5WC BCTD	1.2V	✓	✓
KINGSTON	KVR26S19D8/32	32GB	Micron ODB45 D9XPF	1.2V	✓	✓
Micron	MTA16ATF4G64HZ-2G6B2	32GB	Micron 9FB45 D9XPF	1.2V	✓	✓

➤ **DDR4 2933 Memory modules**

Vendor	Module P/N	Size	Component	Voltage	DIMM socket support	
					1 DIMM	2 DIMM
Kingston	HX429S17IB2K2/16	8GB	7XE75 D9VPP	1.2V	✓	✓

➤ **DDR4 3200 Memory modules**

Vendor	Module P/N	Size	Component	Voltage	DIMM socket support	
					1 DIMM	2 DIMM
* GOODRAM	GR4S4G320S8C-SERC	4GB	SEC 816 K4A4G085WE BCRC	1.2V	✓	✓
Micron	MTA4ATF51264HZ-3G2E1	4GB	7ZE75 D9WFJ	1.2V	✓	✓
Micron	MTA8ATF1G64HZ-3G2E1	8GB	7XE75 D9WFL	1.2V	✓	✓
Kingston	HX432S20IB2K2/16	8GB	7XE75 D9VPP	1.2V	✓	✓
* Apacer	AS08GGB32CLYBGD	8GB	SEC 819 K4A8G08	1.2V	✓	✓

* The default recognized clock is not 3200MHz, running at 3200MHz requires manual configuration in BIOS. (Advanced > AMD CBS > UMC Common Options > DDR4 Common Options > DRAM Timing Configuration > Overclock > Memory Clock Speed)

Qualified Vendors List for SSD

➤ M.2 SSD

Vander	Model / PN	Interface	Capacity
2280 Form factor <NVMe>			
ADATA	XPG GAMMIX S70 BLADE	PCIe Gen 4 x4	1TB
Kingston	NV2 SNV2S250G	PCIe Gen 4 x4	250GB
Samsung	PM9B1 MZ-VL41T00	PCIe Gen 4 x4	1TB
Teamgroup	T-FORCE TMBFPL250G	PCIe Gen 4 x4	250GB
Kingston	KC1000 SKC1000/240G NVMe	PCIe Gen 3 x4	240GB
Kingston	KC2500 SKC2500M8250G	PCIe Gen 3 x4	250GB
PLEXTOR	PX-128M8PeGN	PCIe Gen 3 x4	128GB
Samsung	970 EVO Plus MZ-V7S250	PCIe Gen 3 x4	250GB
Samsung	970 PRO MZ-V7P512	PCIe Gen 3 x4	512GB
Toshiba	KXG50ZNV256G	PCIe Gen 3 x4	256GB
Western Digital	SN720 SDAPNTW-256G-1016	PCIe Gen 3 x4	256GB
Kingston	A1000 SA1000M8/480G	PCIe Gen 3 x2	480GB
LITEON	PP3-8D128	PCIe Gen 3 x2	128GB
2280 Form factor <SATA>			
BIWIN	G6312 CNF82DS 1805-128	SATA	128GB
Crucial	CT128M550SSD4	SATA	128GB
Intel	SSDSCGW080A4	SATA	80GB
innodisk	M.2 (S80) 3TE7 DEM28-64GDK1EC1DF	SATA	64GB
Intel	SSDSCGW080A4	SATA	80GB
Kingston	SUV500M8/240G	SATA	240GB
Micron	1100 MTFDDAV256TBN	SATA	256GB
Micron	1100 MTFDDAV512TBN	SATA	512GB
PLEXTOR	PX-128M6G-2280	SATA	128GB
SanDisk	Z400S SD8SNAT-128G-1002	SATA	128GB
SanDisk	Z400S SD8SNAT-256G-1002	SATA	256GB
SanDisk	X400 SD8SN8U-512G-1122	SATA	512GB
Samsung	MZ-NLN128C	SATA	128GB
Samsung	MZ-N5E250	SATA	250GB
Western Digital	WDS120G1G0B-00RC30	SATA	120GB

➤ 2.5" SSD

Vander	Model / PN	Interface	Capacity
ADVANTECH	SQF-S25M8-128G-S8C	SATA	128GB
ADATA	S510 AS510S3-60GB	SATA	60GB
LITEON	PH6-CE120G	SATA	120GB
Intel	SSDSC2CW120A3	SATA	120GB
Kingston	SVP100S264G	SATA	64GB
Kingston	SHF37A/120GG	SATA	120GB
Kingston	SUV500/240G	SATA	240GB
Micron	M500 MTFDDAK120MAV	SATA	120GB
Micron	M510 MTFDDAK256MAZ	SATA	256GB
SanDisk	X110 SD6SB1M064G1022I	SATA	64GB
SanDisk	Z400s SD8SBAT-128G	SATA	128GB
SanDisk	Z400s SD8SBAT-256G	SATA	256GB
Samsung	850 PRO MZ-7KE256	SATA	256GB

Qualified Vendors List for WIFI+BT

Vander	Model
Intel	AX210 WiFi 6E
Intel	9260NGW
Intel	8260NGW
Intel	3165NGW
MediaTek	MT7922 WIFI-6E (RZ616)
Realtek	RTL8852BE

Appendix C: Expansion Board & Connector

Expansion Connector

The expansion connector is high-speed interface for specific peripherals such as cameras or high speed networking. The signals and pin numbers of connector are provided in the following Table.

Type	Signal	Count
GTYP	High Speed transceivers GTYP x4 Tx/Rx data lines + RefClk	20 (10 diff-pairs)
XPIO	User configurable XPIO	54 (27 diff-pairs)
HDIO	User configurable HDIO	22
XPIO VCCO	User XPIO bank supply voltage	2
HDIO VCCO	User HDIO bank supply voltage	2
PWR_EN	VCCO power sequence control	1
1-Wire	Board-ID 1-Wire PROM	1
3V3	3.3V supply to daughtercard	4

Connector Power

The expansion connector includes three power supplies for providing user flexibility in the definition of the FPGA I/O rails as well as providing power to the daughtercard without requiring a separate cable. The expansion connector power pins are described below table

Connector Power	Source → Sink	Rating
3V3	Base board → Daughtercard	3.3V @ 1A
XPIO_VCCO	Daughtercard → Base board	1.0-1.5V @ 500mA
HDIO_VCCO	Daughtercard → Base board	1.8-3.3V @ 500mA

➤ Absolute Maximum Ratings

Symbol	Description	Min	Max
VCCO_XPIO	XPIO bank 7# output driver power supply	-0.5V	1.65V
VCCO_HDIO	HDIO bank 3# output driver power supply	-0.5V	3.63V

➤ Recommended Operating Conditions

Symbol	Description	Min	Typ	Max
VCCO_XPIO	XPIO bank 7# output driver power supply Includes VCCO of 1.0V, 1.1V, 1.2V, 1.35V, 1.5V at ±5%	0.950V	-	1.575V
VCCO_HDIO	HDIO bank 3# output driver power supply Includes VCCO of 1.8V, 2.5V at ±5%, and 3.3V at +3/-5%	1.710V	-	3.4V

Power Enable (VCC_CARD_EN)

A power enable (VCC_CARD_EN) signal is routed from the Versal device to the expansion card to be used by the local expansion card local power supplies. This signal used to gate the HDIO_VCCO and XPIO_VCCO power supplies. The HDIO_VCCO and XPIO_VCCO power supplies should remain low until the PWR_EN signal goes high.

1-Wire ID(LPD_MIO4_GPIO)

The 1-Wire interface is to be used to implement an expansion card ID mechanism. A 1-wire compliant EEPROM is to be implemented on the expansion card which will capture board name and revision. This information can then be used by the Versal device to ensure PL bitstream to expansion card alignment.

The interface is powered through its I/O pin which will be connected to the 1.8V MIO through a pull-up resistor. An example device is the Microchip AT21CS01/AT21CS11.

DC Input and Output Levels

➤ Operating Conditions

Symbol	Description	Min	Typ	Max
VCC_CARD_EN	PSIO BANK5# PMC MIO31	1.71V	1.8V	1.89V
LPD_MIO4_GPIO	PSIO BANK5# LPD MIO4	1.71V	1.8V	1.89V
GTP	GTP transceiver	1.164V	1.2V-	1.236V

➤ PSIO BANK : Input and Output Levels

I/O Standard	V _{IL}		V _{IH}		V _{OL}	V _{OH}	I _{OL}	I _{OH}
	V, Min	V, Max	V, Min	V, Max	V, Max	V, Min	mA	mA
LVC MOS18	-0.300	0.63	1.17	1.83	0.45	1.35	4, 8, or 12	4, 8, or 12

➤ SelectIO standard for HDIO Banks : DC Input and Output Levels

I/O Standard ^{1, 2}	V _{IL}		V _{IH}		V _{OL}	V _{OH}	I _{OL}	I _{OH}
	V, Min	V, Max	V, Min	V, Max	V, Max	V, Min	mA	mA
HSTL_I_18	-0.300	50% V _{CCO} - 0.100	50% V _{CCO} + 0.100	V _{CCO} + 0.300	0.400	V _{CCO} - 0.400	8.0	-8.0
LVC MOS18	-0.300	35% V _{CCO}	65% V _{CCO}	V _{CCO} + 0.300	0.450	V _{CCO} - 0.450	Note 3	Note 3
LVC MOS25	-0.300	0.700	1.700	V _{CCO} + 0.300	0.400	V _{CCO} - 0.400	Note 3	Note 3
LVC MOS33	-0.300	0.800	2.000	3.400	0.400	V _{CCO} - 0.400	Note 3	Note 3
LVTTL	-0.300	0.800	2.000	3.400	0.400	2.400	Note 3	Note 3
SSTL18_I	-0.300	50% V _{CCO} - 0.125	50% V _{CCO} + 0.125	V _{CCO} + 0.300	V _{CCO} /2 - 0.470	V _{CCO} /2 + 0.470	8.0	-8.0

Notes:

1. Tested according to relevant specifications.
2. Standards specified using the default I/O standard configuration. For details, see the *Versal Adaptive SoC SelectIO Resources Architecture Manual (AM010)*.
3. Supported drive strengths of 4, 8, or 12 mA in HDIO banks.

➤ SelectIO standard for XPIO Banks : DC Input and Output Levels

I/O Standard ^{1, 2, 3}	V _{IL}		V _{IH}		V _{OL}	V _{OH}	I _{OL}	I _{OH}
	V, Min	V, Max	V, Min	V, Max	V, Max	V, Min	mA	mA
HSTL_I	-0.300	50% V _{CCO} - 0.100	50% V _{CCO} + 0.100	V _{CCO} + 0.300	0.400	V _{CCO} - 0.400	5.8	-5.8
HSTL_I_12	-0.300	50% V _{CCO} - 0.080	50% V _{CCO} + 0.080	V _{CCO} + 0.300	25% V _{CCO}	75% V _{CCO}	4.1	-4.1
HSUL_12	-0.300	50% V _{CCO} - 0.130	50% V _{CCO} + 0.130	V _{CCO} + 0.300	20% V _{CCO}	80% V _{CCO}	0.1	-0.1
LVC MOS12	-0.300	35% V _{CCO}	65% V _{CCO}	V _{CCO} + 0.300	0.400	V _{CCO} - 0.400	Note 4	Note 4
LVC MOS15	-0.300	35% V _{CCO}	65% V _{CCO}	V _{CCO} + 0.300	0.450	V _{CCO} - 0.450	Note 5	Note 5
LVDCI_15	-0.300	35% V _{CCO}	65% V _{CCO}	V _{CCO} + 0.300	0.450	V _{CCO} - 0.450	7.0	-7.0
SSTL12	-0.300	50% V _{CCO} - 0.100	50% V _{CCO} + 0.100	V _{CCO} + 0.300	V _{CCO} /2 - 0.150	V _{CCO} /2 + 0.150	8.0	-8.0
SSTL135	-0.300	50% V _{CCO} - 0.090	50% V _{CCO} + 0.090	V _{CCO} + 0.300	V _{CCO} /2 - 0.150	V _{CCO} /2 + 0.150	9.0	-9.0
SSTL15	-0.300	50% V _{CCO} - 0.100	50% V _{CCO} + 0.100	V _{CCO} + 0.300	V _{CCO} /2 - 0.175	V _{CCO} /2 + 0.175	10.0	-10.0

Notes:

1. Tested according to relevant specifications.
2. Standards specified using the default I/O standard configuration. For details, see the *Versal Adaptive SoC SelectIO Resources Architecture Manual (AM010)*.
3. POD10 and POD12 DC input and output levels are shown in Table 11, Table 16, and Table 17.
4. Supported drive strengths of 2, 4, 6, or 8 mA in XPIO banks.
5. Supported drive strengths of 2, 4, 6, 8, or 12 mA in XPIO banks.

➤ Complementary Differential SelectIO standard for HDIO Banks : DC Input and Output Levels

I/O Standard	V _{ICM} (V) ¹			V _{ID} (V) ²		V _{OL} (V) ³	V _{OH} (V) ⁴	I _{OL}	I _{OH}
	Min	Typ	Max	Min	Max	Max	Min	mA	mA
DIFF_HSTL_I_18	0.300	0.900	1.425	0.100	-	0.400	V _{CCO} - 0.400	8.0	-8.0
DIFF_SSTL18_I	0.300	0.900	1.425	0.100	-	(V _{CCO} /2) - 0.47	(V _{CCO} /2) + 0.47	8.0	-8.0
LVDS_25	0.300	1.200	1.425	0.100	0.600	-	-	-	-
SUB_LVDS	0.500	0.900	1.300	0.070	-	-	-	-	-
LVPECL	0.300	1.200	1.425	0.100	0.600	-	-	-	-
SLVS_400_25	0.070	0.200	0.330	0.140	0.450	-	-	-	-

Notes:

1. V_{ICM} is the input common mode voltage.
2. V_{ID} is the input differential voltage (Q - $\bar{Q}$).
3. V_{OL} is the single-ended low-output voltage.
4. V_{OH} is the single-ended high-output voltage.

➤ Complementary Differential SelectIO standard for XPIO Banks : DC Input and Output Levels

I/O Standard	V _{ICM} (V) ¹			V _{ID} (V) ²		V _{OL} (V) ³	V _{OH} (V) ⁴	I _{OL}	I _{OH}
	Min	Typ	Max	Min	Max	Max	Min	mA	mA
DIFF_HSTL_I	0.680	V _{CCO} /2	(V _{CCO} /2) + 0.150	0.100	-	0.400	V _{CCO} - 0.400	5.8	-5.8
DIFF_HSTL_I_12	0.400 x V _{CCO}	V _{CCO} /2	0.600 x V _{CCO}	0.100	-	0.250 x V _{CCO}	0.750 x V _{CCO}	4.1	-4.1
DIFF_HSUL_12	(V _{CCO} /2) - 0.120	V _{CCO} /2	(V _{CCO} /2) + 0.120	0.100	-	20% V _{CCO}	80% V _{CCO}	0.1	-0.1
DIFF_SSTL12	(V _{CCO} /2) - 0.150	V _{CCO} /2	(V _{CCO} /2) + 0.150	0.100	-	(V _{CCO} /2) - 0.150	(V _{CCO} /2) + 0.150	8.0	-8.0
DIFF_SSTL135	(V _{CCO} /2) - 0.150	V _{CCO} /2	(V _{CCO} /2) + 0.150	0.100	-	(V _{CCO} /2) - 0.150	(V _{CCO} /2) + 0.150	9.0	-9.0
DIFF_SSTL15	(V _{CCO} /2) - 0.175	V _{CCO} /2	(V _{CCO} /2) + 0.175	0.100	-	(V _{CCO} /2) - 0.175	(V _{CCO} /2) + 0.175	10.0	-10.0

Notes:

1. V_{ICM} is the input common mode voltage.
2. V_{ID} is the input differential voltage.
3. V_{OL} is the single-ended low-output voltage.
4. V_{OH} is the single-ended high-output voltage.

➤ Differential SelectIO standard for MIPI_DPHY : DC Input and Output Levels

I/O Standard	V _{ICM} (V) ¹			V _{ID} (V) ²			V _{ILHS} ³	V _{IHHS} ³	V _{OCM} (V) ⁴			V _{OD} (V) ⁵		
	Min	Typ	Max	Min	Typ	Max	Min	Max	Min	Typ	Max	Min	Typ	Max
MIPI_DPHY for operation <1.5 Gb/s ⁷	0.070	–	0.330	0.070	–	–	–0.040	0.460	0.150	0.200	0.250	0.140	0.200	0.270
MIPI_DPHY for operation at >1.5G Gb/s ⁷	0.070	–	0.330	0.040	–	–	–0.040	0.460	0.150	0.200	0.250	0.140	0.200	0.270

Notes:

1. V_{ICM} is the input common mode voltage.
2. V_{ID} is the input differential voltage (Q – $\bar{Q}$).
3. V_{IHHS} and V_{ILHS} are the single-ended input high and low voltages, respectively.
4. V_{OCM} is the output common mode voltage.
5. V_{OD} is the output differential voltage (Q – $\bar{Q}$).
6. LVDS15 is specified in Table 18.
7. High-speed option for MIPI_DPHY. The V_{ID} maximum is aligned with the standard's specification. A higher V_{ID} is acceptable as long as the V_{IN} specification is also met.

➤ GTYP Transceiver : DC Input and Output Levels

GTYP Transceiver DC Specifications

Symbol	DC Parameter	Conditions	Min	Typ	Max	Units
DV _{PPIN}	Differential peak-to-peak input voltage (external AC coupled)	>10.3125 Gb/s	150	–	1250	mV
		6.6 Gb/s to 10.3125 Gb/s	150	–	1250	mV
		≤ 6.6 Gb/s	150	–	2000	mV
V _{IN}	Single-ended input voltage. Voltage measured at the pin referenced to GND.	DC coupled V _{GTYP_AVIT} = 1.2V	–200	–	V _{GTYP_AVIT}	mV
V _{CMIN}	Common mode input voltage	DC coupled V _{GTYP_AVIT} = 1.2V	–	2/3 V _{GTYP_AVIT}	–	mV
DV _{PPOUT}	Differential peak-to-peak output voltage ¹	Transmitter output swing is set to 1.1111	800	–	–	mV
V _{CMOUTDC}	Common mode output voltage: DC coupled (equation based) ²	When remote RX termination is floating	DV _{PPOUT} /2			mV
		When remote RX is terminated to V _{RX_TERM} ³	V _{RX_TERM} /2 + DV _{PPOUT} /4			mV
V _{CMOUTAC}	Common mode output voltage: AC coupled	Equation based	DV _{PPOUT} /2			mV
R _{IN}	Differential input resistance		–	100	–	Ω
R _{OUT}	Differential output resistance		–	100	–	Ω
T _{OSKEW}	Transmitter output pair (TXP and TXN) intra-pair skew		–	–	10	ps
C _{EXT}	Recommended external AC coupling capacitor ⁴		–	100	–	nF

Notes:

1. The output swing and pre-emphasis levels are programmable using the GTY and GTYP transceiver attributes discussed in the *Versal Adaptive SoC GTY and GTYP Transceivers Architecture Manual (AM002)* and can result in values lower than reported in this table.
2. Remote RX termination = GND is not supported.
3. V_{RX_TERM} is the remote RX termination voltage. V_{CMOUTDC}, V_{RX_TERM} should be less than 0.92V.
4. Other values can be used as appropriate to conform to specific protocols and standards.

➤ GTYP Transceiver Clock Output Level Specification

Symbol	Description	Conditions	Min	Typ	Max	Units
VOL	Output Low voltage for P and N	RT = 100Ω across P and N signals	100	–	330	mV
VOH	Output High voltage for P and N	RT = 100Ω across P and N signals	500	–	700	mV
VDDOUT	Differential output voltage (P–N), P = High (N–P), N = High	RT = 100Ω across P and N signals	300	–	430	mV
VCMOUT	Common mode voltage	RT = 100Ω across P and N signals	300	–	500	mV

PCB Routing Constrains for Daughter Board

Signal name	impedance	Max Length	space	Length Matching and note
VCC_CARD_EN LPD_MIO4_GPIO HDIO[0..21]	50 ohm	5"	3H *	
GTYP_CLKP/N[0..1]	85 ohm	3"	5H*	1. Difference between P and N traces within a differential pair 0.75ps
GTYP_TXP/N[0..3]	85 ohm	3"	5H*	1. Difference between P and N traces within a differential pair 0.5ps 2. Difference between differential pairs lane to lane <1250ps
GTYP_RXP/N[0..3]	85 ohm	3"	5H*	1. Difference between P and N traces within a differential pair 0.5ps 2. Difference between differential pairs lane to lane <1250ps
XPIO_L[0..26]P/N	100 ohm	1.5"	5H*	1. Difference between P and N traces within a differential pair 0.5ps Note1

* H is the distance to the nearest ground return plane.

Note1: Length Matching Routing Rule for XPIO with different defined

1. For interfacing with PHYs with adjustable internal delays, skew between GEMx_TX_DATA[0:3]/GEMx_TX_CTRL and GEMx_TX_CLK should be within 50 ps.
2. For interfacing with PHYs with adjustable internal delays, skew between GEMx_RX_DATA[0:3]/GEMx_RX_CTRL and GEMx_RX_CLK should be within 50 ps.
3. For interfacing with MIPI. Skew between clock and data should be within ± 2 ps.

Consult the Versal Adaptive SoC GTYP Transceivers Architecture Manual (AM002) for further details.

For GTY/GTYP transceiver interfaces such as DisplayPort, SGMII, PCIe®, SATA, and USB3.0, refer to Versal ACAP GTY and GTYP Transceivers Architecture Manual (AM002).
<https://docs.xilinx.com/r/en-US/am002-versal-gty-transceivers/Transceiver-and-Tool-Overview>

Versal ACAP SelectIO Resources Architecture Manual (AM010)
<https://docs.xilinx.com/r/en-US/am010-versal-selectio/Overview>